

# CVT

## Технические характеристики

### По вопросам продаж и поддержки обращайтесь:

Алматы (7273)495-231	Казань (843)206-01-48	Новокузнецк (3843)20-46-81	Смоленск (4812)29-41-54
Архангельск (8182)63-90-72	Калининград (4012)72-03-81	Новосибирск (383)227-86-73	Сочи (862)225-72-31
Астрахань (8512)99-46-04	Калуга (4842)92-23-67	Омск (3812)21-46-40	Ставрополь (8652)20-65-13
Барнаул (3852)73-04-60	Кемерово (3842)65-04-62	Орел (4862)44-53-42	Сургут (3462)77-98-35
Белгород (4722)40-23-64	Киров (8332)68-02-04	Оренбург (3532)37-68-04	Тверь (4822)63-31-35
Брянск (4832)59-03-52	Краснодар (861)203-40-90	Пенза (8412)22-31-16	Томск (3822)98-41-53
Владивосток (423)249-28-31	Красноярск (391)204-63-61	Пермь (342)205-81-47	Тула (4872)74-02-29
Волгоград (844)278-03-48	Курск (4712)77-13-04	Ростов-на-Дону (863)308-18-15	Тюмень (3452)66-21-18
Вологда (8172)26-41-59	Липецк (4742)52-20-81	Рязань (4912)46-61-64	Ульяновск (8422)24-23-59
Воронеж (473)204-51-73	Магнитогорск (3519)55-03-13	Самара (846)206-03-16	Уфа (347)229-48-12
Екатеринбург (343)384-55-89	Москва (495)268-04-70	Санкт-Петербург (812)309-46-40	Хабаровск (4212)92-98-04
Иваново (4932)77-34-06	Мурманск (8152)59-64-93	Саратов (845)249-38-78	Челябинск (351)202-03-61
Ижевск (3412)26-03-58	Набережные Челны (8552)20-53-41	Севастополь (8692)22-31-93	Череповец (8202)49-02-64
Иркутск (395)279-98-46	Нижний Новгород (831)429-08-12	Симферополь (3652)67-13-56	Ярославль (4852)69-52-93
Россия (495)268-04-70	Киргизия (996)312-96-26-47	Казахстан (7172)727-132	

# Energy Management Compact Transducer for AC Measurements Type CVT-DIN AV1/AV4/AV5

CARLO GAVAZZI



- For AC current/voltage measurement
- Field adjustment capability
- For DIN-rail mounting
- Degree of protection: IP 50

## Product Description

Compact transducer for AC current/voltage measurements with field adjustment capability. The housing is for DIN-rail mounting and ensures a degree of protection of IP 50.

## Ordering Key

**CVT-DIN AV5AD01X**

Model \_\_\_\_\_  
 Range code \_\_\_\_\_  
 Measurement \_\_\_\_\_  
 Power supply \_\_\_\_\_  
 Setpoints \_\_\_\_\_  
 Rated output \_\_\_\_\_  
 Calibration \_\_\_\_\_

## Type Selection

Range code	Power supply	Rated output	Calibration
<b>AV1:</b> 100 VAC - 1 AAC (max. 120 VAC - 1.2 A)	<b>A:</b> 24 VAC, -15% +10%, 50/60 Hz <sup>1)</sup>	<b>1:</b> Analogue output 0 to 20 mA (standard)	<b>X:</b> Standard calibration
<b>AV4:</b> 100 VAC - 5 AAC (max. 120 VAC - 6 A)	<b>B:</b> 48 VAC, -15% +10%, 50/60 Hz <sup>1)</sup>	<b>2:</b> Analogue output 4 to 20 mADC <sup>1)</sup>	<b>Y:</b> Special calibration, use "Y" followed by requested value
<b>AV5:</b> 500 VAC - 5 AAC (max. 600 VAC - 6 A)	<b>C:</b> 115 VAC, -15% +10%, 50/60 Hz <sup>1)</sup>	<b>3:</b> Analogue output 0 to 10 VDC <sup>1)</sup>	
	<b>D:</b> 230 VAC, -15% +10%, 50/60 Hz (standard)	<b>4:</b> Analogue output 0 to ±1 VDC <sup>1)</sup>	

<sup>1)</sup> On request

## Input Specifications

<b>Accuracy</b> (@ 25°C ± 5°C, R.H. ≤ 60%)	± 0.5% f.s., (0.1 In/Un to 1 In/Un)	<b>AC frequency range</b>	48 to 62 Hz
Additional errors:	The given accuracy already includes: frequency, power supply, output load influences	<b>Overload protection</b>	
Humidity	< 0.3%, 60% to 90% R.H.	Cont.: Current:	1.2 x rated input
Input frequency	< 0.4%, 62 to 400 Hz	For 1 s: Current:	1.2 x rated input
Magnetic field	< 0.5%, @ 400 A/m	Voltage:	20 x rated input
<b>Ripple</b>	≤ 1% according to IEC 60688-1 and EN 60688-1	Voltage:	2 x rated input
<b>Rated input</b>			
AV1:	1 A (1 V internal shunt/1 Ω imp)/ 100 VAC (200 kΩ impedance)		
AV4:	5 A (250 mV internal shunt/ 0,05 Ω impedance) / 100 VAC (200 kΩ imp.)		
AV5:	5 A (250 mV internal shunt/ 0,05 Ω impedance) / 500 VAC (1 MΩ imp.)		



## General Specifications

Warm-up time	15 minutes
Operating temperature	0 to 50°C (32 to 122°F) (R.H. < 90% non-condensing)
Storage temperature	-10 to 60°C (14 to 140°F) (R.H. < 90% non-condensing)
Insulation reference voltage	300 V <sub>rms</sub> to ground
Insulation	2000 V <sub>rms</sub> between output and measuring input, output and supply input. 4000 V <sub>rms</sub> between input/output and ground
Dielectric strength	4000 V <sub>rms</sub> for 1 minute
Noise rejection CMRR	≥ 80 dB, 48 to 62 Hz
EMC	EN 50081-1, EN 50082-1

<b>Safety standards</b>	
Safety requirements	IEC 601010-1, EN 61010-1
Product requirements	IEC 60688-1, EN 60688-1
<b>Connector</b>	Screw-type, max. 2.5 mm <sup>2</sup> wires
<b>Housing</b>	
Dimensions	4-DIN modules, 58.5 x 89 x 71.5 mm
Material	ABS, self-extinguishing: UL 94 V-0
<b>Degree of protection</b>	IP 50
<b>Weight</b>	300 g approx. (packing included)
<b>Approval</b>	CE


## Output Specifications

<b>Range/load</b>	
0 to 20 mA	Load: ≤ 500 Ω
4 to 20 mA	Load: ≤ 500 Ω
0 to 10 V	Load: ≥ 10 kΩ
0 to ±1 V	Load: ≥ 10 kΩ
<b>Adjustment</b>	Easy field adjustment from 50 to 130% of the I/U inputs which can be modified without any calibrator being requested
<b>Response time</b>	300 ms typical
<b>Temperature drift</b>	200 ppm/°C


## Supply Specifications

<b>AC supply</b>	230 VAC, -15% +10%, 50/60 Hz (standard) 24 VAC, 48 VAC, 115 VAC, -15% +10%, 50/60 Hz (on request)
<b>Power consumption</b>	≤ 5 VA

## Dimensions

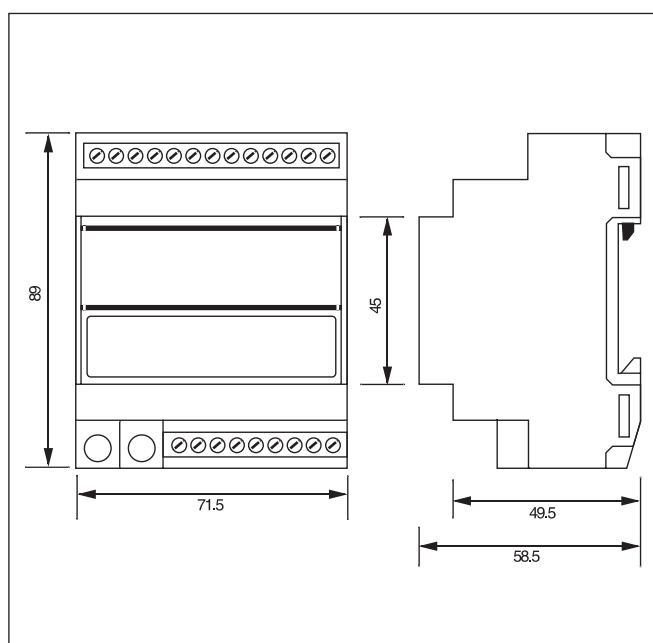

## Connections

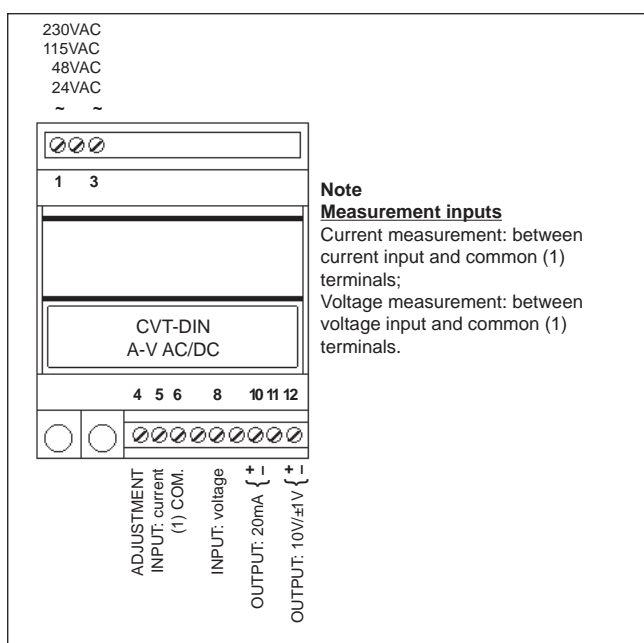

# Current and Voltage Controls

## Compact Transducer for AC Measurements

### Type CVT-DIN AV1/AV4/AV5




- For AC current/voltage measurement
- Field adjustment capability
- For DIN-rail mounting
- Degree of protection: IP 50

### Product Description

Compact transducer for AC current/voltage measurements with field adjustment capability. The housing is for DIN-rail mounting and ensures a degree of protection of IP 50.

### Ordering Key CVT-DIN AV1AD01X

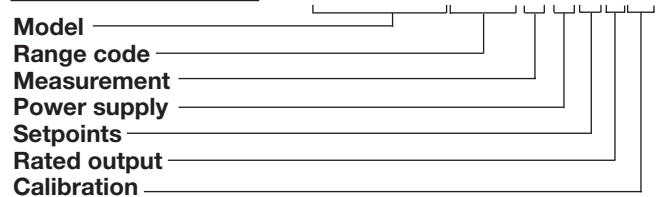

### Type Selection

Range code	Power supply	Rated output	Calibration
<b>AV1:</b> 100 VAC - 1 AAC (max. 120 VAC - 1.2 A)	<b>A:</b> 24 VAC, -15% +10%, 50/60 Hz <sup>1)</sup>	<b>1:</b> Analogue output 0 to 20 mA (standard)	<b>X:</b> Standard calibration
<b>AV4:</b> 100 VAC - 5 AAC (max. 120 VAC - 6 A)	<b>B:</b> 48 VAC, -15% +10%, 50/60 Hz <sup>1)</sup>	<b>2:</b> Analogue output 4 to 20 mADC <sup>1)</sup>	<b>Y:</b> Special calibration, use "Y" followed by requested value
<b>AV5:</b> 500 VAC - 5 AAC (max. 600 VAC - 6 A)	<b>C:</b> 115 VAC, -15% +10%, 50/60 Hz <sup>1)</sup>	<b>3:</b> Analogue output 0 to 10 VDC <sup>1)</sup>	
	<b>D:</b> 230 VAC, -15% +10%, 50/60 Hz (standard)	<b>4:</b> Analogue output 0 to ±1 VDC <sup>1)</sup>	

<sup>1)</sup> On request


### Input Specifications

<b>Accuracy</b> (@ 25°C ± 5°C, R.H. ≤ 60%)	± 0.5% f.s., (0.1 In/Un to 1 In/Un)	<b>AC frequency range</b>	48 to 62 Hz
Additional errors:	The given accuracy already includes: frequency, power supply, output load influences	<b>Overload protection</b>	
Humidity	< 0.3%, 60% to 90% R.H.	Cont.: Current:	1.2 x rated input
Input frequency	< 0.4%, 62 to 400 Hz	Voltage:	1.2 x rated input
Magnetic field	< 0.5%, @ 400 A/m	For 1 s: Current:	20 x rated input
<b>Ripple</b>	≤ 1% according to IEC 60688-1 and EN 60 688-1	Voltage:	2 x rated input
<b>Rated input</b>			
AV1:	1 A (1 V internal shunt/1 Ω imp)/ 100 VAC (200 kΩ impedance)		
AV4:	5 A (250 mV internal shunt/ 0,05 Ω impedance) / 100 VAC (200 kΩ imp.)		
AV5:	5 A (250 mV internal shunt/ 0,05 Ω impedance) / 500 VAC (1 MΩ imp.)		

## General Specifications

<b>Warm-up time</b>	15 minutes
<b>Operating temperature</b>	0 to 50°C (32 to 122°F) (R.H. < 90% non-condensing)
<b>Storage temperature</b>	-10 to 60°C (14 to 140°F) (R.H. < 90% non-condensing)
<b>Insulation reference voltage</b>	300 V <sub>rms</sub> to ground
<b>Insulation</b>	2000 V <sub>rms</sub> between output and measuring input, output and supply input. 4000 V <sub>rms</sub> between input/output and ground
<b>Dielectric strength</b>	4000 V <sub>rms</sub> for 1 minute
<b>Noise rejection</b> CMRR	≥ 80 dB, 48 to 62 Hz
<b>EMC</b>	EN 50 081-1, EN 50 082-1
<b>Safety standards</b>	
Safety requirements	IEC 601010-1, EN 61 010-1
Product requirements	IEC 60688-1, EN 60 688-1
<b>Connector</b>	Screw-type, max. 2.5 mm <sup>2</sup> wires
<b>Housing</b>	
Dimensions	4-DIN modules, 58.5 x 89 x 71.5 mm
Material	ABS, self-extinguishing: UL 94 V-0
<b>Degree of protection</b>	IP 50
<b>Weight</b>	300 g approx. (packing included)

## Dimensions

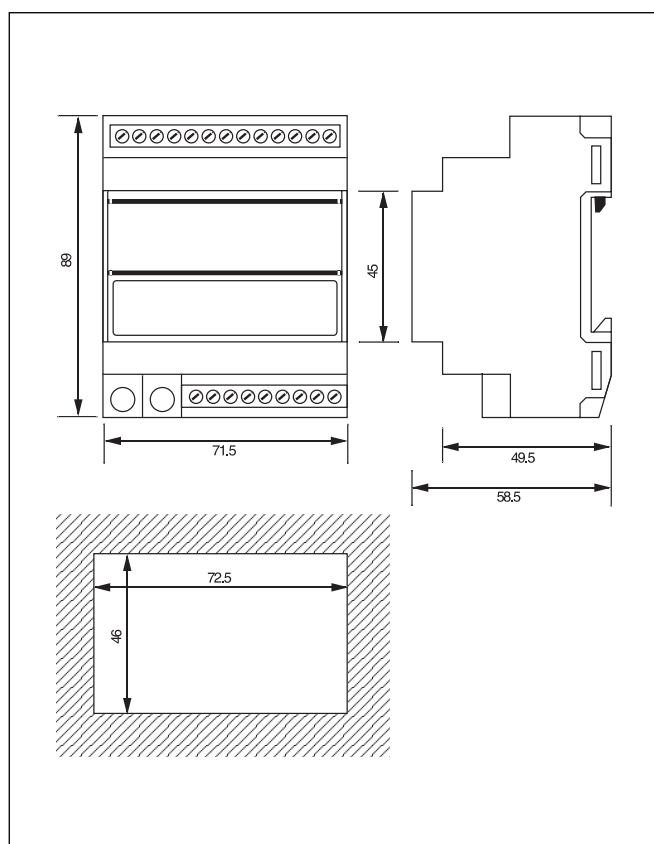

## Output Specifications

<b>Range/load</b>	
0 to 20 mA	Load: ≤ 500 Ω
4 to 20 mA	Load: ≤ 500 Ω
0 to 10 V	Load: ≥ 10 kΩ
0 to ±1 V	Load: ≥ 10 kΩ
<b>Adjustment</b>	Easy field adjustment from 50 to 130% of the I/U inputs which can be modified with- out any calibrator being re- quested
<b>Response time</b>	300 ms typical
<b>Temperature drift</b>	200 ppm/°C

## Supply Specifications

<b>AC supply</b>	230 VAC, -15% +10%, 50/60 Hz (standard) 24 VAC, 48 VAC, 115 VAC, -15% +10%, 50/60 Hz (on request)
<b>Power consumption</b>	≤ 5 VA

**По вопросам продаж и поддержки обращайтесь:**

Алматы (7273)495-231  
Архангельск (8182)63-90-72  
Астрахань (8512)99-46-04  
Барнаул (3852)73-04-60  
Белгород (4722)40-23-64  
Брянск (4832)59-03-52  
Владивосток (423)249-28-31  
Волгоград (844)278-03-48  
Вологда (8172)26-41-59  
Воронеж (473)204-51-73  
Екатеринбург (343)384-55-89  
Иваново (4932)77-34-06  
Ижевск (3412)26-03-58  
Иркутск (395)279-98-46  
Россия (495)268-04-70

Казань (843)206-01-48  
Калининград (4012)72-03-81  
Калуга (4842)92-23-67  
Кемерово (3842)65-04-62  
Киров (8332)68-02-04  
Краснодар (861)203-40-90  
Красноярск (391)204-63-61  
Курск (4712)77-13-04  
Липецк (4742)52-20-81  
Магнитогорск (3519)55-03-13  
Москва (495)268-04-70  
Мурманск (8152)59-64-93  
Набережные Челны (8552)20-53-41  
Нижний Новгород (831)429-08-12  
Киргизия (996)312-96-26-47

Новокузнецк (3843)20-46-81  
Новосибирск (383)227-86-73  
Омск (3812)21-46-40  
Орел (4862)44-53-42  
Оренбург (3532)37-68-04  
Пенза (8412)22-31-16  
Пермь (342)205-81-47  
Ростов-на-Дону (863)308-18-15  
Рязань (4912)46-61-64  
Самара (846)206-03-16  
Санкт-Петербург (812)309-46-40  
Саратов (845)249-38-78  
Севастополь (8692)22-31-93  
Симферополь (3652)67-13-56  
Казахстан (7172)727-132

Смоленск (4812)29-41-54  
Сочи (862)225-72-31  
Ставрополь (8652)20-65-13  
Сургут (3462)77-98-35  
Тверь (4822)63-31-35  
Томск (3822)98-41-53  
Тула (4872)74-02-29  
Тюмень (3452)66-21-18  
Ульяновск (8422)24-23-59  
Уфа (347)229-48-12  
Хабаровск (4212)92-98-04  
Челябинск (351)202-03-61  
Череповец (8202)49-02-64  
Ярославль (4852)69-52-93