

UDM

Технические характеристики

По вопросам продаж и поддержки обращайтесь:

Алматы (7273)495-231
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89
Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Россия (495)268-04-70

Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81
Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Киргизия (996)312-96-26-47

Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Казахстан (7172)727-132

Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93

Digital Panel Meters

Modular Indicator and Controller

Type UDM35

CARLO GAVAZZI



- Front protection degree: IP67, NEMA12, NEMA4x "Indoor use only"
- Linearization of Hz inputs up to 16 points

- Multi-input modular instrument 3 1/2 DGT LED
- 0.1% RDG basic accuracy
- TRMS AC current and voltage measurements
- AC/DC current measurements: selectable full scales (200µA to 5A)
- AC/DC voltage measurements: selectable full scales (200mV to 500V)
- °C or °F temperature measurements (Pt100-250-500-1000, Ni100, TC J-K-S-T-E)
- Resistance measurements: selectable full scales (20Ω to 20kΩ)
- Dual rate, speed, frequency and period measurement (0.001Hz to 50kHz)
- Up to 4 independent alarm set-points (optional)
- 20mA/10VDC analog output (optional)
- Serial port RS485 or RS232 (optional)
- MODBUS, JBUS communication protocol

Product Description

μp-based digital panel meter, 3 1/2 DGT LED indicator, for current, voltage, temperature, resistance, rate, frequency, speed and period measurements. Measuring ranges and functions easily programmable from the key-pad or from the PC by means of optional UdmSoft software. UDM35 includes storage min-max functions and double level protection password. Housing for panel mounting with front protection degree: IP67, NEMA12, NEMA4x "Indoor use only".

How to order

UDM35 XXX XX XX X XX

Model _____
 Slot A _____
 Slot B _____
 Slot C _____
 Slot D _____
 Options _____

How to order **UdmSoft-kit**

UdmSoft-kit: software plus communication cable for programming UDM35 by means of PC.

UdmSoft: software for programming UDM35/40/60 by means of PC.

Type Selection

Slot A (measuring inputs)	Slot B (communication)	Slot C (communication and alarm)	Slot D (power supply)
LSX: signal inputs: 0.2-2-20mA DC/AC; 0.2-2-20V DC/AC	XX: None SX: Serial port RS485 SY: Serial port RS232 AV(*): Single analogue output, 0 to 20mA DC and 0 to 10V DC	XX: None R1: Single relay output, (AC1-8AAC, 250VAC) R2: Dual relay output, (AC1-8AAC, 250VAC) R4: Dual relay output, (AC1- 8AAC, 250VAC) + dual open collector output (NPN, 100mA) R5: 4 relay outputs (AC1-5AAC, 250VAC) AV(*): Single analogue output, 0 to 20mA DC and 0 to 10V DC	H: 90 to 260V AC/DC L: 18 to 60V AC/DC (24 to 48V AC/DC ± 25% according to UL) 3: 10 to 28V DC (12 to 24V DC ± 15% according to UL)
LSE/ LSF: signal inputs: + AUX: 0.2-2-20mA DC/AC; 0.2-2-20V DC/AC			
HSX: signal inputs: 0.2-2-5A DC/AC; 20-200-500V DC/AC			
TRX: signal inputs: TC tem- perature probes (J-K- S-T-E, Pt100-250-500- 1000) and resistance (0.02-0.2-2-20kΩ)			
TF1: 0.001Hz to 50kHz for DC signals: PNP, NPN, NAMUR, TTL, free of voltage, con- tacts, voltages up to 14VDC	(*): The two analogue outputs cannot be used at the same time. It is possible to plug in only one module by instru- ment.		Options
TF2: 0.001Hz to 50kHz for AC signals: pick-up, voltages up to 500VAC			XX: None TX: Tropicalization

Input specifications

Analogue inputs	Channels and variable 1, mA and V DC/AC 1, mA and V DC/AC + AUX 1, A and V DC/AC 1, temperature 1, resistance 2, frequency 2, frequency	Magnetic field	0.5% RDG (BQTFx: 0.05%) @ 400 A/m
Type of input		Temperature drift	See table "Measurement accuracy, temperature drifts, and max/min indications"
NPN (DC)	Signal level: ON < 2VDC, OFF open collector (leakage current <=1mA).	Sampling rate	500 samples/s @ 50 Hz (escl. BQTFx)
PNP (DC)	Signal level: ON > 10VDC, OFF open collector (leakage current <=1mA).	Display refresh time	200 msec @ 50Hz (escl. BQTFx)
NAMUR (DC)	Signal level: ON <= 1mADC, OFF >= 2.2 mADC.	Display	BQxxx: 3 1/2 DGT, BQTFx: 4 DGT 7 segments height 14.2 mm
TTL (DC)	Signal level: ON > 4VDC, OFF <= 2VDC.	Max and min indication	See table "Measurement accuracy, temperature drifts and max min indications"
Free of voltage contact(DC)	Input load: ON < 1kohm, OFF > 20kohm.	Measurements	Current, voltage, temperature, resistance and frequency. For the current and voltage measurements: TRMS measurement of distorted sine waves.
Voltage (AC) up to 100VAC	Signal level: ON > 2VAC (5.65 Vpp).	Coupling type	Direct
Voltage (AC) up to 500VAC	Signal level: ON > 9VAC (25.4 Vpp).	Crest factor	≤ 3 ; $A_{Pmax}=1.7In$; $V_{Pmax}=1.7Un$
Digital inputs	Incl. in the measuring module	Input impedance	See table "input impedances and overloads"
Number of inputs	1 (voltage-free)		
Use	key-pad lock Display hold Reset of latch alarms	Frequency	40 to 440 Hz
Contact reading signal	BQ xxx: <0.1mA, <3.5V DC BQ LSE/BQ LSF: <2.5mA, <14V DC BQTF1: <6mA, <7VDC BQTF2: <0.25mA, <3VDC Max 1kΩ Min 500kΩ(BQTFx: 100kΩ) Non-insulated	Overload	See table "input impedances and overloads"
Close contact resistance		Compensation	Only temperature measurement module.
Open contact resistance		RTD	- For Pt 100-250-500-1000, 3-wire connection: up to 10Ω
Insulation		TC	- For resistance measur. with 20Ω range: up to max 0.1Ω
Accuracy (display, RS485)	See table "Measuring accuracy", temperature drifts and minimum-maximum indications"		- For resistance measurements with ≥ 200Ω range: up to max 10Ω
			Internal cold junction, within temperature range from 0 to +50°C.
Additional errors			Automatic or manual compensation from 0 to 50°C.
Humidity	0.3% RDG (BQTFx: 0.05%), 60% to 90% R.H.		
Input frequency	0.4% RDG, 62 to 440 Hz		

Measurement accuracy, temp. drifts, max and min indications

All accuracies and min/max indications are referred to an ambient temp. range of $25^{\circ}\text{C} \pm 5^{\circ}\text{C}$, rel. humidity $\leq 60\%$ and scale ratio (electrical/displayed scale) equal to 1. The conversion into $^{\circ}\text{F}$ is obtained acting on the electrical/displayed scale ratio.

Module	Inputs	Type	Accuracy	Temp. drift	Min. indication (■)	Max. indicat. (■)
BQ LSX/ BQ LSE/ BQ LSF	-200µA to +200µA -2mA to +2mA -20mA to +20mA -200mV to +200mV -2V to +2V -20V to +20V	DC/AC	DC: $\pm(0.1\%\text{RDG}+3\text{DGT})$ 0% to 25% FS; $\pm(0.1\%\text{RDG}+2\text{DGT})$ 25% to 110% FS. TRMS (da 45 a 65Hz)*: $\pm(0.3\%\text{RDG}+3\text{DGT})$ 0% to 25% FS; $\pm(0.3\%\text{RDG}+2\text{DGT})$ 25% to 110% FS.	$\pm 150 \text{ ppm}/^{\circ}\text{C}$	- 199.9 - 1.999 - 19.99 - 199.9 - 1.999 - 19.99	+ 199.9 + 1.999 + 19.99 + 199.9 + 1.999 + 19.99

* $<45\text{Hz} >65\text{Hz} = \pm(0.5\%\text{RDG}+3\text{DGT})$ 0% to 25% FS; $\pm(0.5\%\text{RDG}+2\text{DGT})$ 25% to 110% FS.

(■) The min. indication for TRMS measurement (AC or DC) is 0; it is possible to modify the decimal point position.

Measurement accuracy, temp. drifts, max and min indications (cont.)

All accuracies and min/max indications are referred to an ambient temp. range of $25^{\circ}\text{C} \pm 5^{\circ}\text{C}$, rel. humidity $\leq 60\%$ and scale ratio (electrical/displayed scale) equal to 1. The conversion into $^{\circ}\text{F}$ is obtained acting on the electrical/displayed scale ratio.

Module	Inputs	Type	Accuracy	Temp. drift	Min. indication (■)	Max. indicat. (■)
BQ HSX	-200mA to +200mA -2A to +2A -5A to +5A -20V to +20V -200V to +200V -500V to +500V	DC/AC	DC: $\pm(0.1\% \text{ RDG} + 3\text{DGT})$ 0% to 25% FS; $\pm(0.1\% \text{ RDG} + 2\text{DGT})$ 25% to 110% FS. TRMS (45 to 65Hz)*: $\pm(0.3\% \text{ RDG} + 3\text{DGT})$ 0% to 25% FS; $\pm(0.3\% \text{ RDG} + 2\text{DGT})$ 25% to 110% FS.	$\pm 150 \text{ ppm}/^{\circ}\text{C}$	- 199.9 - 1.999 - 5.00 - 19.99 - 199.9 - 500	+ 199.9 + 1.999 + 5.00 + 19.99 + 199.9 + 500
BQ TRX Thermo-couple	-50°C to +760°C -58°F to +1400°F -200°C to +1260°C -328°F to +2300°F -200°C to +1000°C -328°F to +1832°F -50°C to +1750°C -58°F to +3182°F -200°C to +400°C -328°F to +752°F	J J K K E E S S T T	$\pm(0.2\% \text{ RDG} + 1\text{DGT})$ $\pm(0.2\% \text{ RDG} + 2\text{DGT})$ $\pm(0.2\% \text{ RDG} + 2\text{DGT})$ $\pm(0.2\% \text{ RDG} + 4\text{DGT})$ $\pm(0.2\% \text{ RDG} + 2\text{DGT})$ $\pm(0.2\% \text{ RDG} + 4\text{DGT})$ $\pm(0.2\% \text{ RDG} + 2\text{DGT})$ $\pm(0.2\% \text{ RDG} + 4\text{DGT})$ $\pm(0.2\% \text{ RDG} + 2\text{DGT})$ $\pm(0.2\% \text{ RDG} + 4\text{DGT})$	$\pm 150 \text{ ppm}/^{\circ}\text{C}$	- 50°C - 58°F - 200°C - 328°F - 200°C - 328°F - 50°C - 58°F - 200°C - 328°F	+ 760°C + 1400°F + 1260°C + 2300°F + 1000°C + 1832°F + 1750°C + 3182°F + 400°C + 752°F

* $<45\text{Hz} >65\text{Hz} = \pm(0.5\% \text{ RDG} + 3\text{DGT})$ 0% to 25% FS; $\pm(0.5\% \text{ RDG} + 2\text{DGT})$ 25% to 110% FS.

(■) The min. indication for TRMS measurement (AC or DC) is 0; it is possible to modify the decimal point position.

Module	Inputs	Type	Accuracy	Temp. drift	Min. indication	Max. indicat.
BQ TRX Thermoresistance	-200°C to +850°C -328°F to +1562°F -200.0°C to +200.0°C -328°F to +392°F -200.0°C to +200.0°C -328°F to +392°F -200.0°C to +200.0°C -328°F to +392°F -200.0°C to +200.0°C -328°F to +392°F -60°C to +180°C -76°F to +356°F	Pt100 Pt100 Pt100 Pt100 Pt250 Pt250 Pt500 Pt500 Pt1000 Pt1000 Ni100 Ni100	$\pm(0.2\% \text{ RDG} + 2\text{DGT})$ $\pm(0.2\% \text{ RDG} + 4\text{DGT})$ $\pm(0.5\% \text{ RDG} + 5\text{DGT})$ $\pm(0.5\% \text{ RDG} + 1\text{DGT})$ $\pm(0.5\% \text{ RDG} + 2\text{DGT})$	$\pm 150 \text{ ppm}/^{\circ}\text{C}$	- 200 - 328 - 200.0 - 328.0 - 200.0 - 328.0 - 200.0 - 328.0 - 200.0 - 328.0 - 60 - 76	+ 850 + 1562 + 200.0 + 392.0 + 200.0 + 392.0 + 200.0 + 392.0 + 200.0 + 392.0 + 180 + 356
BQ TRX Resistance	0 to 20Ω 0 to 200Ω 0 to 2000Ω 0 to 20.00kΩ		$\pm(0.2\% \text{ RDG} + 2\text{DGT})$ 25% to 110% FS $\pm(0.2\% \text{ RDG} + 3\text{DGT})$ 0% to 25% FS	$\pm 150 \text{ ppm}/^{\circ}\text{C}$	0 0 0 0	19.99 (■) 199.9 (■) 1999 (■) 19.99 (■)
BQ TF1	NPN (DC) PNP (DC) NAMUR (DC) TTL (DC) Free of voltage contact (DC)		0.001% RDG ±3 digit	$\pm 50 \text{ ppm}/^{\circ}\text{C}$	0.000 (*) 00.00 (*) 000.0 (*) 0000 (*)	9.999 99.99 999.9 9999
BQ TF2	Pick-up (AC) Voltage (AC) up to 100VAC Voltage (AC) up to 500VAC		0.001% RDG ±3 digit	$\pm 50 \text{ ppm}/^{\circ}\text{C}$	0.000 (*) 00.00 (*) 000.0 (*) 0000 (*)	9.999 99.99 999.9 9999

(■) It is possible to modify the decimal point position.

(*) The min indication is -9.99999, ..., -999999 in case of "rotation speed detection" function

Input impedances and overloads

Module	Inputs	Type	Impedance	Overload (continuous)	Overloads (1s)
BQ LSX/ BQ LSE/ BQ LSF	-200µA to +200µA -2mA to +2mA -20mA to +20mA -200mV to +200mV -2V to +2V -20V to +20V	DC/AC DC/AC DC/AC DC/AC DC/AC DC/AC	≤2,2kΩ ≤22Ω ≤22Ω ≥2,2kΩ ≥200kΩ ≥200kΩ	5mA 50mA 50mA 10V 50V 50V	10mA 150mA 150mA 20V 100V 100V
BQ HSX	-200mA to +200mA -2A to +2A -5A to +5A -20V to +20V -200V to +200V -500V to +500V	DC/AC DC/AC DC/AC DC/AC DC/AC DC/AC	≤1Ω ≤0.012Ω ≤0.012Ω ≥2MΩ ≥2MΩ ≥2MΩ	0.8A 7.5A 7.5A 750V 750V 750V	1A 100A 100A 1000V 1000V 1000V
BQ TRX Thermo-couple	-50°C to +760°C -58 °F to +1400 °F -200°C to +1260°C -328 °F to +2300°F -200°C to +1000°C -328°F to +1832°F -50°C to +1750°C -58°F to +3182°F -200°C to +400°C -328°F to +752°F	J J K K E E S S T T	I _{LK} <0.5µA	Max 5V	Max 10V
BQ TRX Thermo-resistance	-200°C to +850°C -328°F to +1562°F -200.0°C to +200.0°C -328°F to +392°F -200.0°C to +200.0°C -328°F to +392°F -60°C to +180°C -76°F to +356°F	Pt100 Pt100 Pt250/Pt100 Pt250/Pt100 Pt1000/Pt500 Pt1000/Pt500 Ni100 Ni100	800µA (*) 800µA (*) 90µA (*) 90µA (*) 800µA (*) 800µA (*) 800µA (*) 800µA (*)	Max 5V	Max 10V
BQ TRX Resistance	0 to 20Ω 0 to 200Ω 0 to 2000Ω 0 to 20.00kΩ		800µA (*) 90µA (*) 800µA (*) 90µA (*)	Max 5V	Max 10V
BQ TF1	NPN (DC) PNP (DC) NAMUR (DC) TTL (DC) Free of voltage contact (DC)		600 Ω 600 Ω 600 Ω 600 Ω	15 VAC/DC 15 VAC/DC 15 VAC/DC 15 VAC/DC 15 VAC/DC	20 VAC/DC 20 VAC/DC 20 VAC/DC 20 VAC/DC 20 VAC/DC
BQ TF2	Pick-up (AC) Voltage (AC) up to 100VAC Voltage (AC) up to 500VAC		220 kΩ 950 kΩ	120 VAC/DC 600 VAC/DC	200 VAC/DC 600 VAC/DC

(*) Maximum measuring current generated for resistance equal to 0

Output specifications

RS422/RS485	<p>(on request) Module: BR SX Bidirectional (static and dynamic variables). Display of data reception/transmission Multidrop, 2 or 4 wires, 1000 m Directly on the module by means of jumper 1 to 247, selectable by means of key-pad MODBUS RTU/JBUS</p> <p>Measurement, min value max value alarm status All programming parameters, min max reset reset of latch alarm 8 data bit, no parity, 1 stop bit selectable 4800, 9600, 19200 and 38400 bit/s</p> <p>By means of opto-couplers 4000 V_{ms} output to measuring inputs 4000 V_{ms} output to power supply input</p>	<p>BO R2 (2 relay outputs).</p> <p>Relay output BO R1, R2, R4</p> <p>Relay output BO R5</p> <p>Insulation</p> <p>Open collector output</p> <p>Insulation</p>	<p>4, independent with module BO R4 (2 relay outputs + 2 open collector outputs). BO R5 (4 relay outputs) Type SPST AC 1: 8A, 250VAC DC 12: 5A, 24VDC AC 15: 2.5A, 250VAC DC 13: 2.5A, 24VDC Type SPST (NO) AC 1: 5A, 250VAC DC 12: 3A, 24VDC AC 15: 1.5A, 250VAC DC 13: 1.5A, 24VDC 4000 V_{RMS} output to measuring input, 4000 V_{RMS} output to power supply input. NPN transistor type V_{ON} 1.2 VDC / max. 100 mA V_{OFF} 30 VDC max. By means of opto-couplers 4000 V_{RMS} output to measuring input 4000 V_{RMS} output to power supply input</p>
RS232	<p>(on request) Module: BR SY Bidirectional (static and dynamic variables) 3 wires, max. 15m 1 start bit, 8 data bit, no parity, 1 stop bit Selectable 4800, 9600, 19200 and 38400 bit/s</p>	<p>Range Scaling factor</p> <p>Accuracy Response time Temperature drift Load: 20 mA output 10 V output</p>	<p>0 to 20 mA / 0 to 10V $\pm 0.2\%$ FS (@ 25°C ± 5°C) ≤ 10 ms ± 200 ppm/°C ≤ 700 Ω ≥ 10 kΩ</p> <p>By means of opto-couplers 4000V_{ms} output to measuring input 4000V_{ms} output to power supply input</p> <p>The two outputs cannot be used at the same time.</p>
Alarm outputs	<p>(on request) Alarm type Over-range alarm, up alarm, down alarm, down alarm with start-up deactivation up alarm with latch, down alarm with latch</p> <p>Adjustable from 0 to 100% of displayed electric range 0 to 100% of displayed range 0 to 255 s 0 to 255 s Selectable: normally energized /de-energized 500 ms, with filter excluded, without alarm activation delay 1 with module BO R1 (relay output). 2, independent with module</p>	<p>Insulation</p> <p>Notes:</p>	<p>0 to 20 mA / 0 to 10V $\pm 0.2\%$ FS (@ 25°C ± 5°C) ≤ 10 ms ± 200 ppm/°C ≤ 700 Ω ≥ 10 kΩ</p> <p>By means of opto-couplers 4000V_{ms} output to measuring input 4000V_{ms} output to power supply input</p> <p>The two outputs cannot be used at the same time.</p>
		Excitation output	<p>(on request)</p> <p>BQ LSE Module Voltage</p> <p>BQ LSF Module Voltage</p> <p>BQTF1 Module Voltage 1 Voltage 2</p> <p>Insulation</p>
			<p>13 VDC ±10%, max. 50 mA</p> <p>25 VDC ±10%, max. 25 mA</p> <p>8.2VDC ±10%, max 10mA. 13VDC ±10%, max 40mA. 25V_{RMS} output to measuring input 4000 V_{RMS} output to power supply input</p>

Software functions

Min / Max storage	Automatic storage (in the EEPROM) of the minimum and maximum measured value from the previous memory reset	Input engineering unit	BQTFx only: programmable among Hz, kHz, rpm, krpm, rph, krph
Password	Numeric code max 4 dgt 2 levels of data protection. 0 to 4999 completely protected. 5000 to 9999 access to programming is protected . Alarm set-points are directly programmable from the measuring mode.	Diagnostics Burn-out: TC RTD BQTFx	The display flashes when the limits of the display range are exceeded and the data are updated up to 20% of the rated display range. Only temperature inputs Opening of probe's connection: EEE indication Opening of probe's connection: EEE indication probe's short circuit: -EEE indication. Exceeding of frequency range: Err indication
Measurement selection	Depending on the module: measuring range and type of probe (resistance, RTD thermoresistance, TC thermocouple) or measuring type (TRMS or DC).	Digital filter Filter operating range Filtering coefficient	0 to 9999 1 to 32
Function (only BQTFx)	Displayed functions of channel A and B: F1: scaled value of channel A; F2: 1/A; F3: A-B; F4: (A-B)/B*100; F5: A/B; F6: B/(A+B)+100; F7: rotation sensing.	Display selection	3 1/2 DGT or 3 DGT plus dummy zero (BQTFx excluded) 4 DGT on BQTFx
Integration time selection	Automatic or from 100.0 to 999.9 ms only in the current and voltage measurement. (BQTFx excluded)	Scaling	Selection of min value of the input range. Selection of max value of the input range. Selection of decimal point position. Selection of min display value. Selection of max display value.
Scaling factors Operating mode Electrical range Decimal point position Displayed range of the variable Pulse per revolution	Electrical scale compression, displayed scale compression/expansion (max. 2 without filter, up to 10 with filter) Programmable within the whole measuring range Programmable within the display range Programmable within the display range BQTFx only: programmable from 1 to 9999	UdmSoft	Software for programming UDM35 by means of PC (Windows 95, 98se, ME, XP) by means of serial port RS485 and relevant connection cable. The software is available in English, Spanish, Italian, German and French. See also "Programming of UDM35 by means of PC".


Supply Specifications

AC/DC voltage	90 to 260V (standard) 18 to 60V (on request) (24 to 48V AC/DC ± 25% according to UL)	Energy consumption	≤ 30VA/12W (90 to 260V) ≤ 20VA/12W (18 to 60V) ≤ 7.5W (10 to 28V)
DC voltage only	10 to 28V (on request) (12 to 24V DC ± 15% according to UL)		

General Specifications

Operating temperature	0° to 50°C (32° to 122°F) (H.R. < 90% non-condensing)	Safety Standards Safety	EN 61010-1, IEC 61010-1
Storage temperature	-10° to 60°C (14° to 140°F) (H.R. < 90% non-condensing)	Connections Cable cross-section area	Screw type Max. 2.5 mm ² ; Min./Max. screws tightening torque: 0.4 Nm / 0.6 Nm
Insulation reference voltage	300 V _{RMS} to ground (500V input)		
Insulation	See table "Insulation between inputs and outputs"		
Dielectric strength	4000 V _{RMS} for 1 minute		
Rejection NMRR CMRR	40 dB, 40 to 60 Hz 100 dB, 40 to 60 Hz	Housing Dimensions Material	1/8 DIN, 48 x 96 x 105 mm PC-ABS, self-extinguishing: UL 94 V-0
EMC	EN61000-6-2, IEC61000-6-2 EN61000-6-3, IEC61000-6-3	Protection degree	Front: IP67, NEMA12, NEMA4x "Indoor use only" Connections: IP20
		Weight	520 g approx (included all modules and packing)
		Approvals	CE, cCSA UL e cRUS

Excitation output

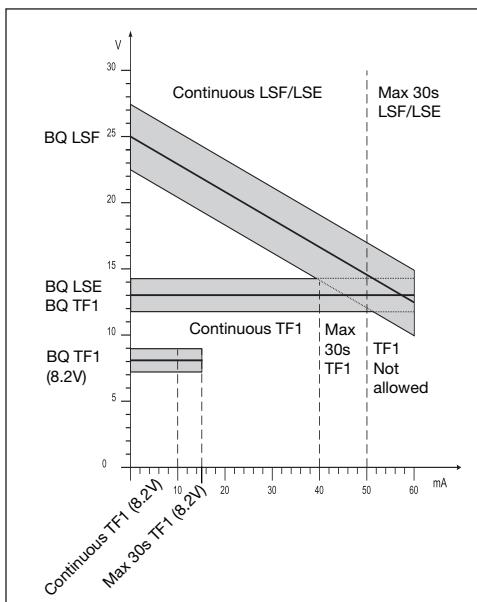

Insulation between inputs and outputs

Available modules

Type	N. of channels	Ordering code
UDM35 main unit		BD 35
DC/AC input: 200µA , 2mA, 20mA, 200mA, 2V, 20V	1	BQ LSX
DC/AC input: 200µA , 2mA, 20mA, 200mA, 2V, 20V + excitation output	1	BQ LSE/ BQ LSF
DC/AC input: 200mA, 2A, 5A, 20V, 200V, 500V	1	BQ HSX
Input: 20Ω, 200Ω, 2kΩ, 20kΩ	1	BQ TRX
TC: J-K-S-T-E, Pt100-250-500-1000	1	BQ TRX
Pulse signals input: 0.001Hz to 50kHz for DC signals	2	BQ TF1
Pulse signals input: 0.001Hz to 50kHz for AC signals	2	BQ TF2
Analogue output 0 to 20mA, 0 to 10VDC	1	BO AV
Relay output	1	BO R1
Relay output	2	BO R2
Outputs: 2 relays + 2 open collectors	4	BO R4
Relay output	4	BO R5
RS485 Serial Port	1	BR SX
RS232 Serial Port	1	BR SY
Power supply 18 to 60V AC/DC		BP L
Power supply 90 to 260V AC/DC		BP H
Power supply 10 to 28V DC		BP 3

Possible module combinations

Basic Unit	Slot A	Slot B	Slot C	Slot D
Measuring inputs: LSX, LSE, LSF, HSX, TRX, TF1, TF2	●			
RS485 Serial port: SX		●		
RS232 Serial port: SY		●		
Analogue output: AV (*)		●	●	
Relay outputs and/or open collector: R1, R2, R4, R5			●	
Power supply: H, L, 3				●

(*) Up to 1 module max.

Used calculation formulas

Only for TRMS Measurements

Instantaneous effective voltage (TRMS)


$$V_1 = \sqrt{\frac{1}{n} \cdot \sum_1^n (V_1)_i^2}$$

Instantaneous effective current (TRMS)


$$A_1 = \sqrt{\frac{1}{n} \cdot \sum_1^n (A_1)_i^2}$$

Wiring diagrams

Process signal wiring diagrams

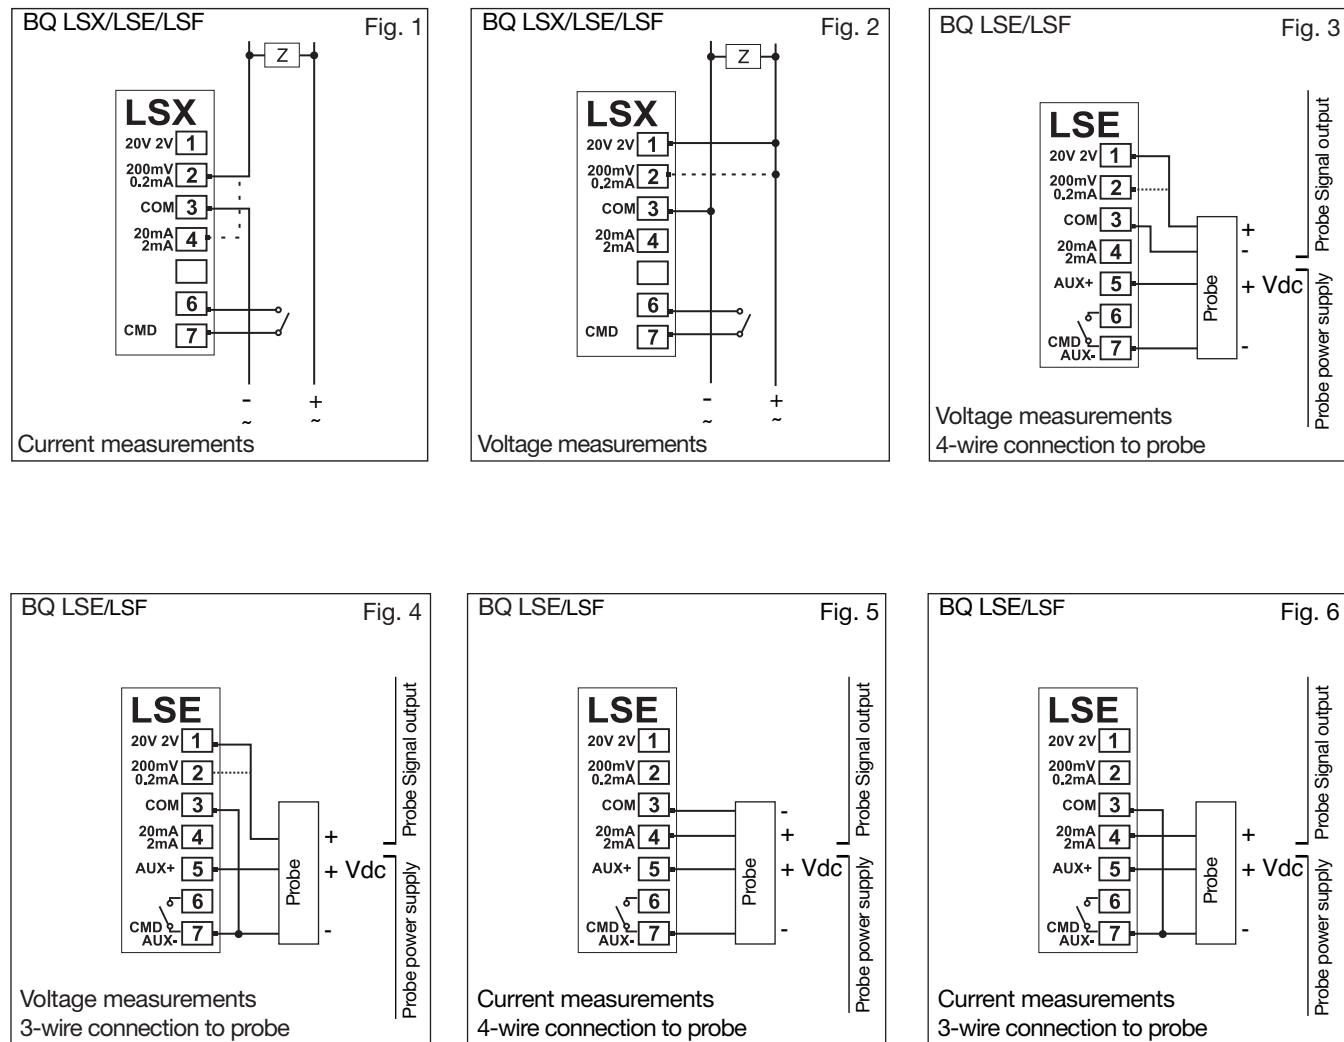


Wirings for high-level signals


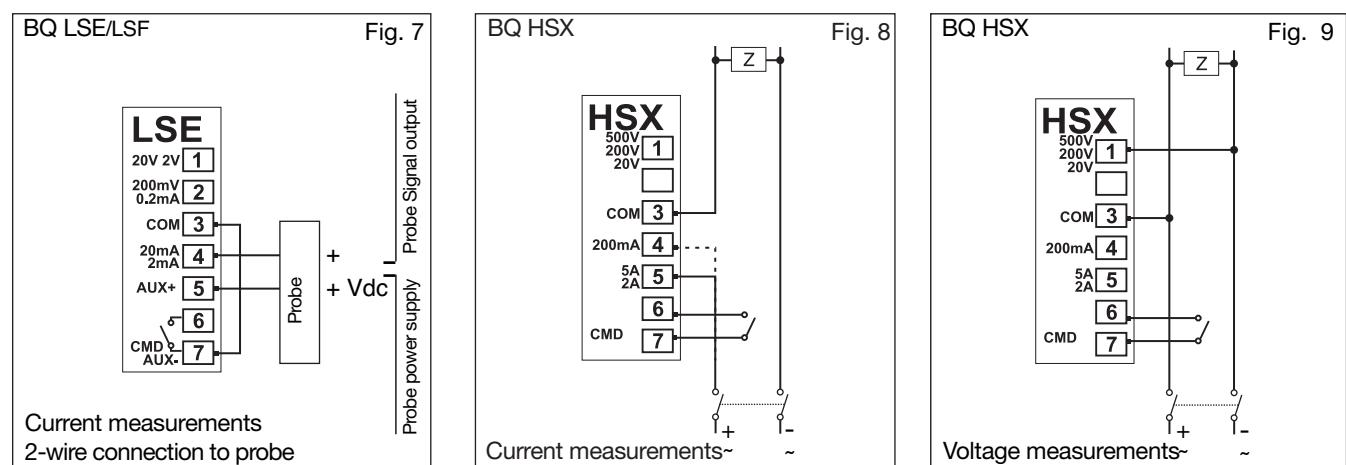


Wiring diagrams (cont.)




Wiring diagrams for temperature measurements

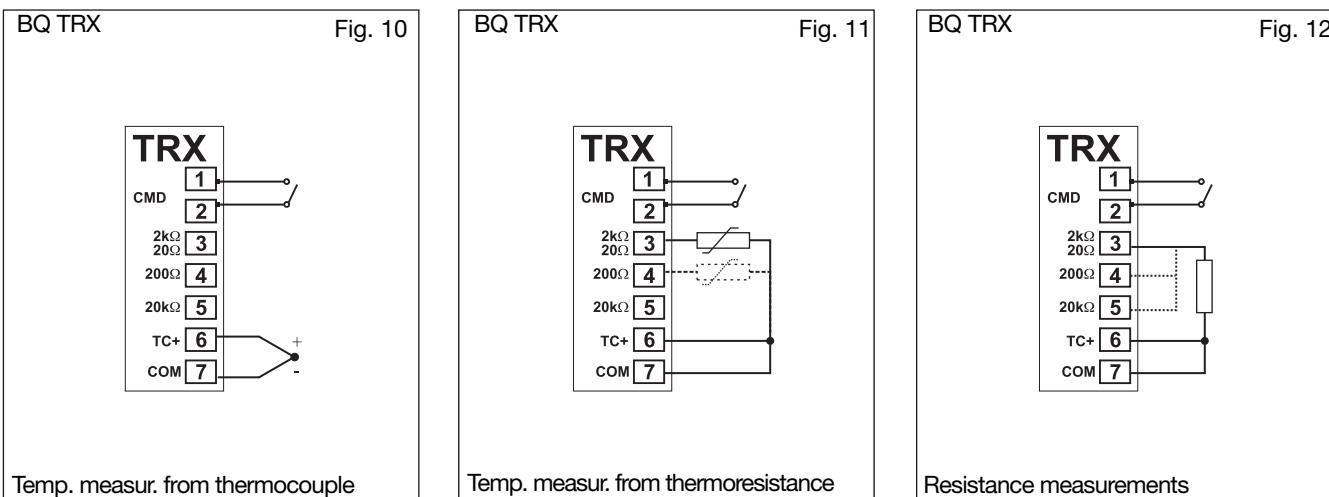


Wiring diagrams for frequency measurements

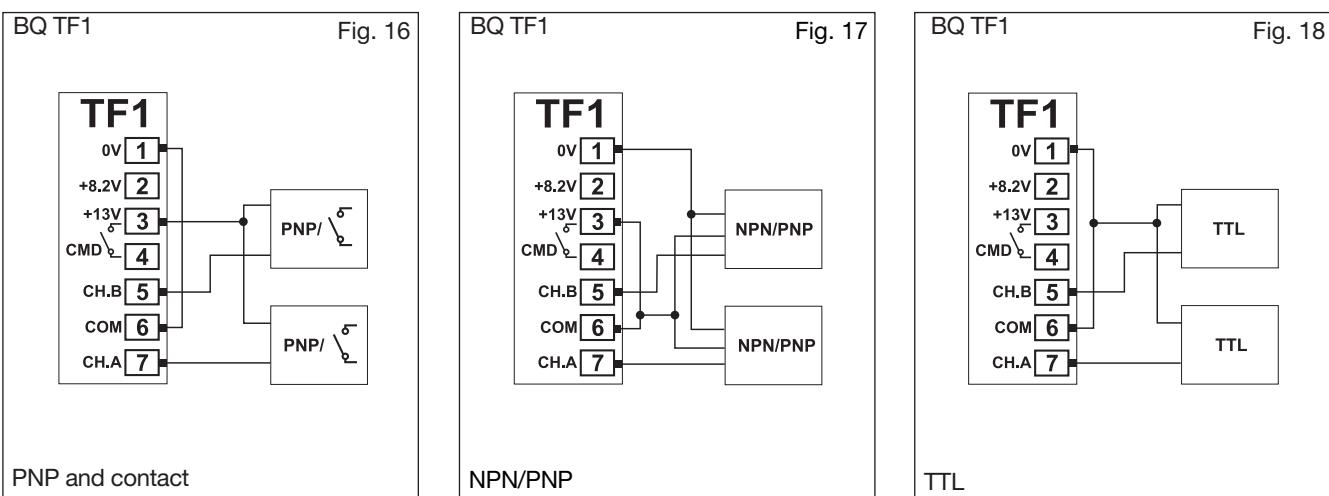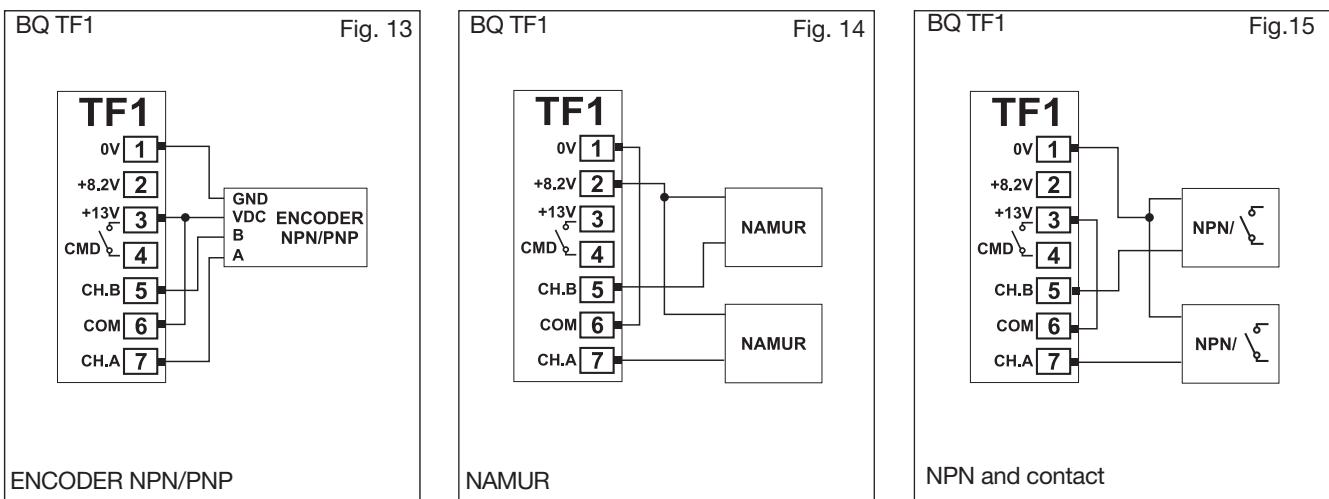


Wiring diagrams (cont.)

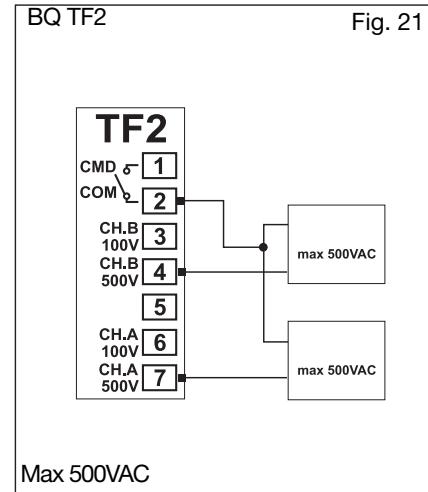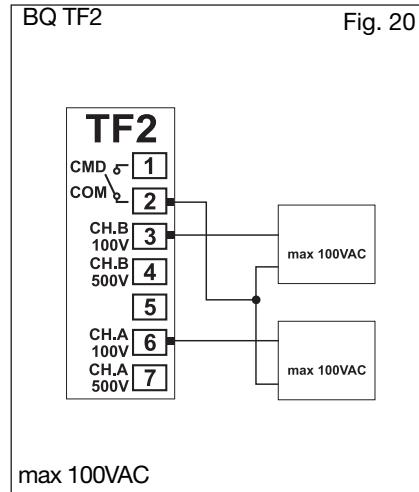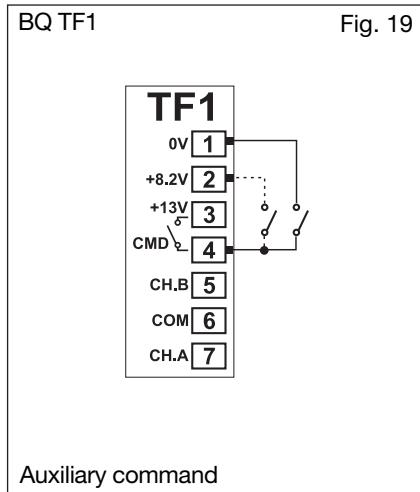


Wiring diagrams for power supply

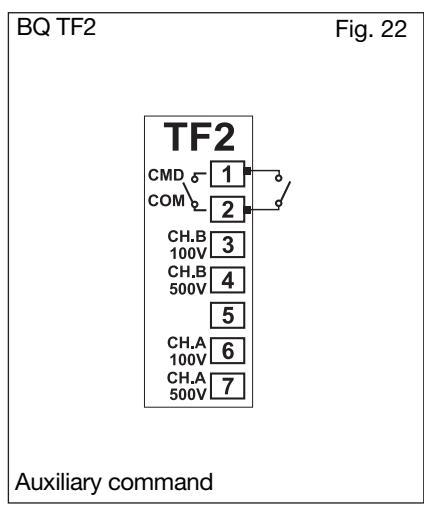


BP H: power supply

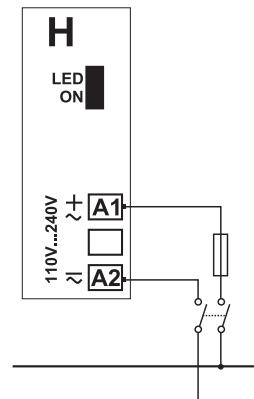


BP L: power supply

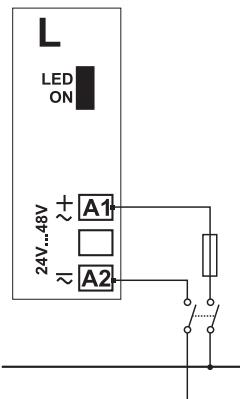


BP 3: power supply

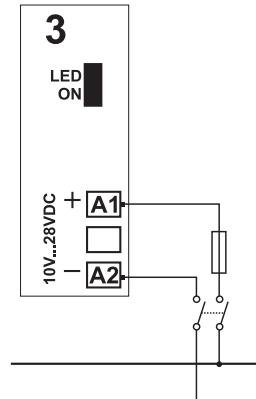


Wiring diagrams of optional modules




BO AV: analogue output
(10V, 20mA DC)



BO R1: 1 relay output





BO R2: 2 relay outputs



BO R5: 4 relay outputs

Wiring diagrams of optional modules (cont.)

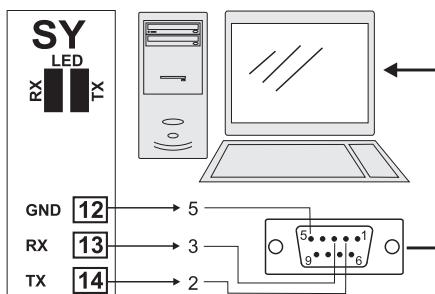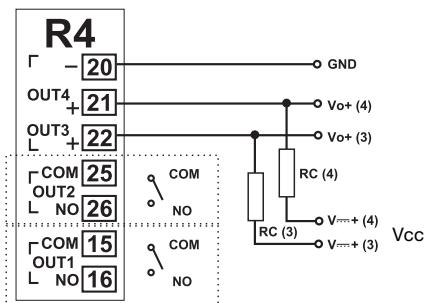


BO SY: RS232 direct connection to PC by means of COM port. RS232 has no terminalization.

BO R4: dual relay output + dual open collector output: the load resistances (Rc) must be designed so that the close contact current is lower than 100mA; the VDC voltage must be lower than or equal to 30VDC.

VDC: power supply output

Vo+: positive output (open collector transistor).


GND: ground (open collector transistor).

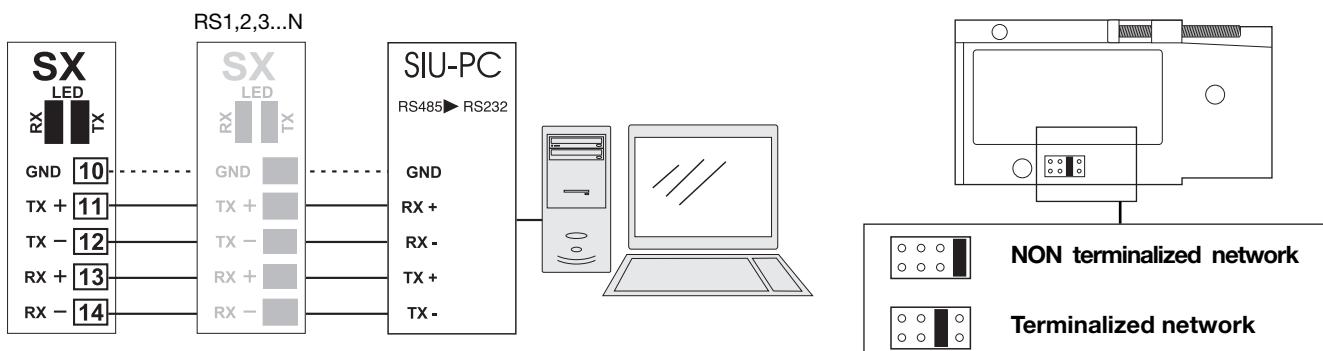

BR SX: RS485 4-wire connection: additional devices provided with RS485 port (indicated as RS1,2,3...N) are connected in parallel. The termination of the serial port is carried out only on the last instrument of the network. The serial module is provided with a jumper for the termination of the RS485 network as shown in the figure above.

Note: particular types of cables or plants may require an external termination. For the network connections use twisted cable type AWG26.


Programming UDM35 by means of PC

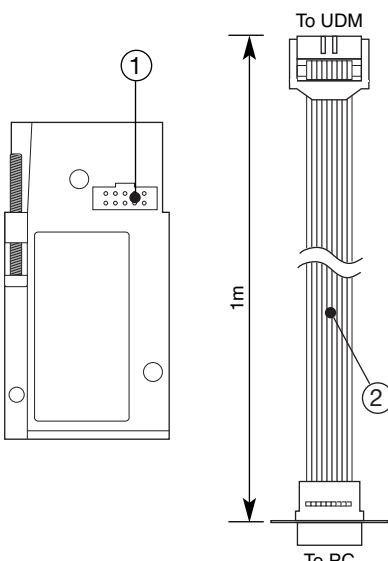

UDM35 is programmable by PC by means of the UdmSoft software (available on request). The user can program all parameters of UDM35 that will be subsequently uploaded and set in the instrument by the RS485 network (BRSX). Should UDM35 be without the RS485 serial module, all programming parameters will be uploaded and set in the instrument by the RS232 auxiliary serial connection (1) located on the side of the measuring input module using the special connection cable (2) available on request, as shown in the figures on the left. It is also possible to program the instrument using the dot connector (1) by means of the HyperTerminal Windows functions of a PC.

Note: the RS232 auxiliary port IS NOT insulated from the measuring inputs.

Front panel description

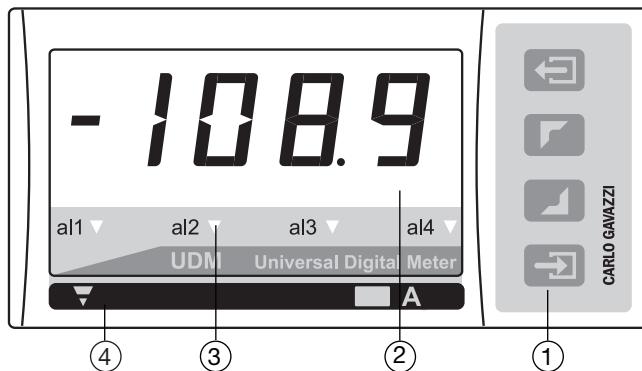

1. Key-pad

The programming of the configuration parameters and the display may be easily controlled by means of the 4 function keys.

: to enter the programming phase and to confirm the password.



- to program values;
- to select functions;
- to scroll display pages.

: for special functions.

2. Display

Instantaneous measurements:

- 3 1/2 digit (max display 1999).
- 4 digit (max display 9999) for tachometer measurements.
- Alphanumeric indications by means of LED display for:
- Display of configuration parameters;
- The measured variable.


3. Alarm status LED

Display any alarm condition

4. Engineering unit

The instrument is supplied with a complete set of self-sticking labels with the main engineering units.

Dimensions

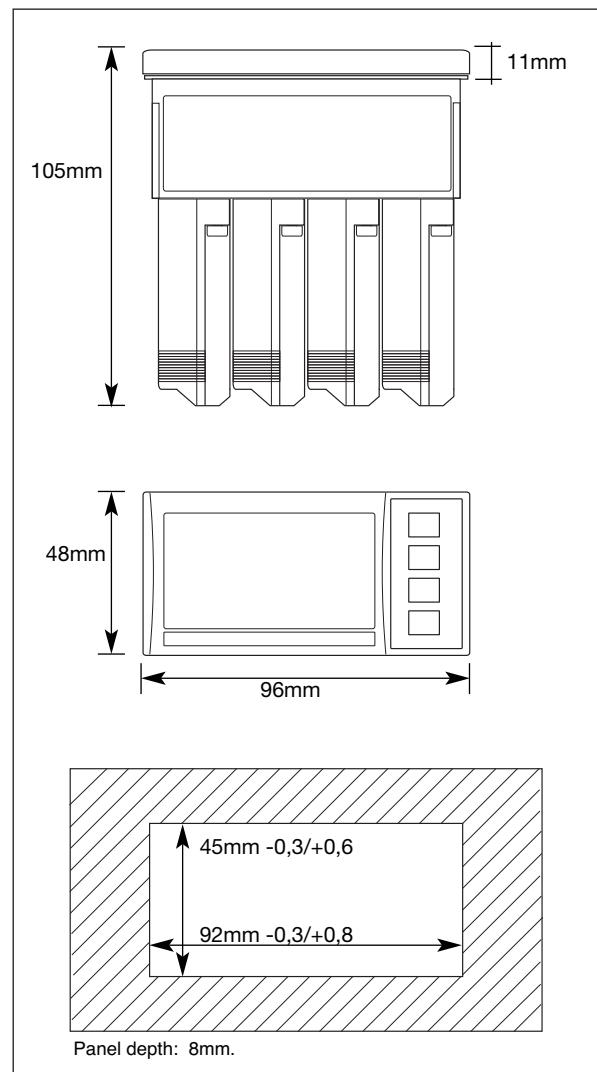


Engineering Units

	A
	V
	VA
	W
	var
	Ω
	g
	Hz
	$^{\circ}\text{F}$
	$^{\circ}\text{C}$
	%
	RPM
	m/
	mm H ₂ O
	mm HG
	l/
	Kg/
	$\text{m}^3/$
	Kg/cm^3
	mbar
	bar
	psi
	mm
	cm
	m
	ppm
	$\cos \phi$


Modules

Input modules




BQ LSX, BQ LSE, BQ LSF, BQ HSX, BQ TRX, BQ TF1, BQ TF2
Measuring inputs


Output modules




BO AV
Single analogue output 10V, 20mA DC

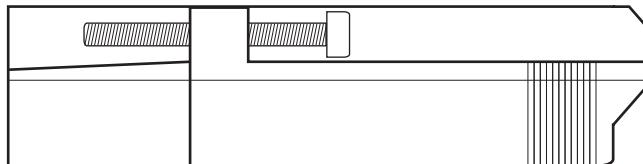


Scale 1:1

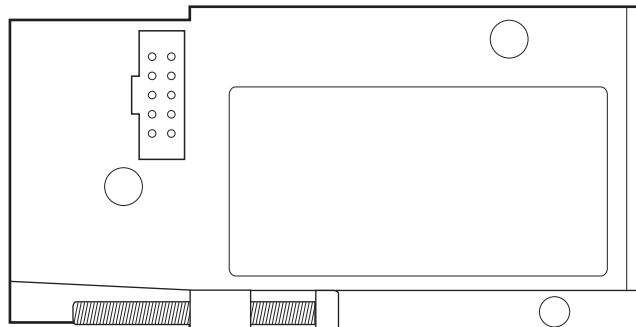


Output modules




BO R1
Single relay output



BO R2
Dual relay output




BO R4
Dual relay output +
Dual open collector




BO R5
4 relay outputs

Serial port modules




BR SX
RS485 Serial port




BR SY
RS232 Serial port


Power supply modules



BP H
Power supply:
60 to 260V AC/DC



BP L
Power supply:
18 to 60V AC/DC



BP 3
Power supply:
10 to 28V DC

Digital Panel Meters

Modular Indicator and Controller

Type UDM40

CARLO GAVAZZI



- LED display, selectable colour (red, amber, green)
- The alarm status can be coupled to the different colour of the display
- Linearization of V, A and Hz inputs up to 16 points

Product Description

up-based digital panel meter, 4-DGT LED indicator, for current, voltage, temperature, resistance, rate, frequency, speed and period measurements. Measuring ranges and functions easily programmable from the keypad or from the PC by

means of optional UdmSoft software. UDM40 includes storage min-max functions and double level protection password. Housing for panel mounting with front protection degree: IP67, NEMA12, NEMA4x "Indoor use only".

- Multi-input modular instrument 4-DGT LED
- 0.1% RDG basic accuracy
- TRMS AC current and voltage measurements
- AC/DC current measurements; selectable full scales (200µA to 5A)
- AC/DC voltage measurements; selectable full scales (200mV to 500V)
- °C or °F temperature measurements (Pt100-250-500-1000, Ni100, TC J-K-S-T-E)
- Resistance measurements; selectable full scales (20Ω to 20kΩ)
- Dual rate, speed, frequency and period measurement (0.001Hz to 50kHz)
- Up to 4 independent alarm set-points (optional)
- 20mA/10VDC analog output (optional)
- Serial port RS485 or RS232 (optional)
- MODBUS, JBUS communication protocol
- Front protection degree: IP67, NEMA12, NEMA4x "Indoor use only"

How to order

UDM40 XXX XX XX X XX

Model	_____
Slot A	_____
Slot B	_____
Slot C	_____
Slot D	_____
Options	_____

How to order

UdmSoft-kit

UdmSoft-kit: software plus communication cable for programming UDM40 by means of PC.

UdmSoft: software for programming UDM35/40/60 by means of PC.

Type Selection

Slot A (measuring inputs)	Slot B (communication)	Slot C (communication and alarm)	Slot D (power supply)
LSX: signal inputs: 0.2-2-20mA DC/AC; 0.2-2-20V DC/AC	XX: None SX: Serial port RS485 SY: Serial port RS232 AV(*): Single analogue output, 0 to 20mA DC and 0 to 10V DC	XX: None R1: Single relay output, (AC1-8AAC, 250VAC) R2: Dual relay output, (AC1-8AAC, 250VAC) R4: Dual relay output, (AC1- 8AAC, 250VAC) + dual open collector output (NPN, 100mA) R5: 4 relay outputs (AC1-5AAC, 250VAC) AV(*): Single analogue output, 0 to 20mA DC and 0 to 10V DC	H: 90 to 260V AC/DC L: 18 to 60V AC/DC (24 to 48V AC/DC ± 25% according to UL) 3: 10 to 28V DC (12 to 24V DC ± 15% according to UL)
LSE/ LSF: signal inputs: + AUX: 0.2-2-20mA DC/AC; 0.2-2-20V DC/AC			
HSX: signal inputs: 0.2-2-5A DC/AC; 20-200-500V DC/AC			
TRX: signal inputs: TC tem- perature probes (J-K- S-T-E, Pt100-250-500- 1000) and resistance (0.02-0.2-2-20kΩ)			
TF1: 0.001Hz to 50kHz for DC signals: PNP, NPN, NAMUR, TTL, free of voltage, con- tacts, voltages up to 14VDC	(*): The two analogue outputs cannot be used at the same time. It is possible to plug in only one module by instru- ment.		Options
TF2: 0.001Hz to 50kHz for AC signals: pick-up, voltages up to 500VAC			
			XX: None TX: Tropicalization

Input specifications

Analogue inputs	Channels and variable	Magnetic field	0.5% RDG (BQTFx: 0.05%) @ 400 A/m
BQ LSX module BQ LSE/LSF module BQ HSX module BQ TRX module BQ TRX module BQTF1 module BQTF2 module	1, mA and V DC/AC 1, mA and V DC/AC + AUX 1, A and V DC/AC 1, temperature 1, resistance 2, frequency 2, frequency		
Type of input		Temperature drift	See table "Measurement accuracy, temperature drifts, and max/min indications"
NPN (DC)		Sampling rate	500 samples/s @ 50 Hz (escl. BQTFx)
PNP (DC)	Signal level: ON < 2VDC, OFF open collector (leakage current <=1mA). Signal level: ON >10VDC, OFF open collector (leakage current <=1mA).	Display refresh time	200 msec @ 50Hz (escl. BQTFx)
NAMUR (DC)	Signal level: ON <= 1mADC, OFF >= 2.2 mADC.	Display	4 DGT, 7 segments height 14.2 mm Selectable (red, amber, green)
TTL (DC)	Signal level: ON >4VDC, OFF<=2VDC. Input load: ON <1kohm, OFF >20kohm.	Max and min indication	See table "Measurement accuracy, temperature drifts and max min indications"
Free of voltage contact(DC)	Signal level: ON > 2VAC (5.65 Vpp).	Measurements	Current, voltage, temperature, resistance and frequency. For the current and voltage measurements: TRMS measurement of distorted sine waves.
Voltage (AC) up to 100VAC	Signal level: ON > 9VAC (25.4 Vpp).	Coupling type	Direct
Voltage (AC) up to 500VAC		Crest factor	$\leq 3; A_{Pmax}=1.7In; V_{Pmax}=1.7Un$
Digital inputs	Incl. in the measuring module	Input impedance	See table "input impedances and overloads"
Number of inputs	1 (voltage-free)	Frequency	40 to 440 Hz
Use	key-pad lock Display hold	Overload	See table "input impedances and overloads"
Contact reading signal	Reset of latch alarms BQ xxx: <0.1mA, <3.5V DC BQ LSE/BQ LSF: <2.5mA, <14V DC BQTF1: <6mA, <7VDC BQTF2: <0.25mA, <3VDC Max 1kΩ Min 500kΩ(BQTFx: 100kΩ) Non-insulated	Compensation	Only temperature measurement module. - For Pt 100-250-500-1000, 3-wire connection: up to 10Ω - For resistance measur. with 20Ω range: up to max 0.1Ω - For resistance measurements with ≥200Ω range: up to max 10Ω Internal cold junction, within temperature range from 0 to +50°C.
Close contact resistance		RTD	
Open contact resistance		TC	
Insulation			Automatic or manual compensation from 0 to 50°C.
Accuracy (display, RS485)	See table "Measuring accuracy", temperature drifts and minimum-maximum indications"		
Additional errors			
Humidity	0.3% RDG (BQTFx: 0.05%), 60% to 90% R.H.		
Input frequency	0.4% RDG, 62 to 440 Hz		

Measurement accuracy, temp. drifts, max and min indications

All accuracies and min/max indications are referred to an ambient temp. range of $25^{\circ}\text{C} \pm 5^{\circ}\text{C}$, rel. humidity $\leq 60\%$ and scale ratio (electrical/displayed scale) equal to 1. The conversion into $^{\circ}\text{F}$ is obtained acting on the electrical/displayed scale ratio.

Module	Inputs	Type	Accuracy	Temp. drift	Min. indication (■)	Max. indicat. (■)
BQ LSX/ BQ LSE/ BQ LSF	-200µA to +200µA -2mA to +2mA -20mA to +20mA -200mV to +200mV -2V to +2V -20V to +20V	DC/AC	DC: $\pm(0.1\%\text{RDG}+3\text{DGT})$ 0% to 25% FS; $\pm(0.1\%\text{RDG}+2\text{DGT})$ 25% to 110% FS. TRMS (da 45 a 65Hz)*: $\pm(0.3\%\text{RDG}+3\text{DGT})$ 0% to 25% FS; $\pm(0.3\%\text{RDG}+2\text{DGT})$ 25% to 110% FS.	$\pm 150 \text{ ppm}/^{\circ}\text{C}$	- 200.0 - 2.000 - 20.00 - 200.0 - 2.000 - 20.00	+ 200.0 + 2.000 + 20.00 + 200.0 + 2.000 + 20.00

* $<45\text{Hz} >65\text{Hz} = \pm(0.5\%\text{RDG}+3\text{DGT})$ 0% to 25% FS; $\pm(0.5\%\text{RDG}+2\text{DGT})$ 25% to 110% FS.

(■) The min. indication for TRMS measurement (AC or DC) is 0; it is possible to modify the decimal point position.

Measurement accuracy, temp. drifts, max and min indications (cont.)

All accuracies and min/max indications are referred to an ambient temp. range of $25^{\circ}\text{C} \pm 5^{\circ}\text{C}$, rel. humidity $\leq 60\%$ and scale ratio (electrical/displayed scale) equal to 1. The conversion into $^{\circ}\text{F}$ is obtained acting on the electrical/displayed scale ratio.

Module	Inputs	Type	Accuracy	Temp. drift	Min. indication (■)	Max. indicat. (■)
BQ HSX	-200mA to +200mA -2A to +2A -5A to +5A -20V to +20V -200V to +200V -500V to +500V	DC/AC	DC: $\pm(0.1\% \text{ RDG} + 3\text{DGT})$ 0% to 25% FS; $\pm(0.1\% \text{ RDG} + 2\text{DGT})$ 25% to 110% FS. TRMS (45 to 65Hz)*: $\pm(0.3\% \text{ RDG} + 3\text{DGT})$ 0% to 25% FS; $\pm(0.3\% \text{ RDG} + 2\text{DGT})$ 25% to 110% FS.	$\pm 150 \text{ ppm}/^{\circ}\text{C}$	- 200.0 - 2.000 - 5.000 - 20.00 - 200.0 - 500.0	+ 200.0 + 2.000 + 5.000 + 20.00 + 200.0 + 500.0
BQ TRX Thermo-couple	-50°C to +760°C -58°F to +1400°F -200°C to +1260°C -328°F to +2300°F -200°C to +1000°C -328°F to +1832°F -50°C to +1750°C -58°F to +3182°F -200°C to +400°C -328°F to +752°F	J J K K E E S S T T	$\pm(0.2\% \text{ RDG} + 1\text{DGT})$ $\pm(0.2\% \text{ RDG} + 2\text{DGT})$ $\pm(0.2\% \text{ RDG} + 2\text{DGT})$ $\pm(0.2\% \text{ RDG} + 4\text{DGT})$ $\pm(0.2\% \text{ RDG} + 2\text{DGT})$ $\pm(0.2\% \text{ RDG} + 4\text{DGT})$ $\pm(0.2\% \text{ RDG} + 2\text{DGT})$ $\pm(0.2\% \text{ RDG} + 4\text{DGT})$ $\pm(0.2\% \text{ RDG} + 2\text{DGT})$ $\pm(0.2\% \text{ RDG} + 4\text{DGT})$	$\pm 150 \text{ ppm}/^{\circ}\text{C}$	- 50°C - 58°F - 200°C - 328°F - 200°C - 328°F - 50°C - 58°F - 200°C - 328°F	+ 760°C + 1400°F + 1260°C + 2300°F + 1000°C + 1832°F + 1750°C + 3182°F + 400°C + 752°F

* $<45\text{Hz} >65\text{Hz} = \pm(0.5\% \text{ RDG} + 3\text{DGT})$ 0% to 25% FS; $\pm(0.5\% \text{ RDG} + 2\text{DGT})$ 25% to 110% FS.

(■) The min. indication for TRMS measurement (AC or DC) is 0; it is possible to modify the decimal point position.

Module	Inputs	Type	Accuracy	Temp. drift	Min. indication	Max. indicat.
BQ TRX Thermoresistance	-200°C to +850°C -328°F to +1562°F -200.0°C to +200.0°C -328°F to +392°F -200.0°C to +200.0°C -328°F to +392°F -200.0°C to +200.0°C -328°F to +392°F -200.0°C to +200.0°C -328°F to +392°F -60°C to +180°C -76°F to +356°F	Pt100 Pt100 Pt100 Pt100 Pt250 Pt250 Pt500 Pt500 Pt1000 Pt1000 Ni100 Ni100	$\pm(0.2\% \text{ RDG} + 2\text{DGT})$ $\pm(0.2\% \text{ RDG} + 4\text{DGT})$ $\pm(0.5\% \text{ RDG} + 5\text{DGT})$ $\pm(0.5\% \text{ RDG} + 1\text{DGT})$ $\pm(0.5\% \text{ RDG} + 2\text{DGT})$	$\pm 150 \text{ ppm}/^{\circ}\text{C}$	- 200 - 328 - 200.0 - 328.0 - 200.0 - 328.0 - 200.0 - 328.0 - 200.0 - 328.0 - 60 - 76	+ 850 + 1562 + 200.0 + 392.0 + 200.0 + 392.0 + 200.0 + 392.0 + 200.0 + 392.0 + 180 + 356
BQ TRX Resistance	0 to 20Ω 0 to 200Ω 0 to 2000Ω 0 to 20.00kΩ		$\pm(0.2\% \text{ RDG} + 2\text{DGT})$ 25% to 110% FS $\pm(0.2\% \text{ RDG} + 3\text{DGT})$ 0% to 25% FS	$\pm 150 \text{ ppm}/^{\circ}\text{C}$	0 0 0 0	20.00 (■) 200.0 (■) 2000 (■) 20.00 (■)
BQ TF1	NPN (DC) PNP (DC) NAMUR (DC) TTL (DC) Free of voltage contact (DC)		0.001% RDG ±3 digit	$\pm 50 \text{ ppm}/^{\circ}\text{C}$	0.000 (*) 00.00 (*) 000.0 (*) 0000 (*)	9.999 99.99 999.9 9999
BQ TF2	Pick-up (AC) Voltage (AC) up to 100VAC Voltage (AC) up to 500VAC		0.001% RDG ±3 digit	$\pm 50 \text{ ppm}/^{\circ}\text{C}$	0.000 (*) 00.00 (*) 000.0 (*) 0000 (*)	9.999 99.99 999.9 9999

(■) It is possible to modify the decimal point position.

(*) The min indication is -9.99999, ..., -999999 in case of "rotation speed detection" function

Input impedances and overloads

Module	Inputs	Type	Impedance	Overload (continuous)	Overloads (1s)
BQ LSX/ BQ LSE/ BQ LSF	-200µA to +200µA -2mA to +2mA -20mA to +20mA -200mV to +200mV -2V to +2V -20V to +20V	DC/AC DC/AC DC/AC DC/AC DC/AC DC/AC	≤2,2kΩ ≤22Ω ≤22Ω ≥2,2kΩ ≥200kΩ ≥200kΩ	5mA 50mA 50mA 10V 50V 50V	10mA 150mA 150mA 20V 100V 100V
BQ HSX	-200mA to +200mA -2A to +2A -5A to +5A -20V to +20V -200V to +200V -500V to +500V	DC/AC DC/AC DC/AC DC/AC DC/AC DC/AC	≤1Ω ≤0.012Ω ≤0.012Ω ≥2MΩ ≥2MΩ ≥2MΩ	0.8A 7.5A 7.5A 750V 750V 750V	1A 100A 100A 1000V 1000V 1000V
BQ TRX Thermo- couple	-50°C to +760°C -58 °F to +1400 °F -200°C to +1260°C -328 °F to +2300°F -200°C to +1000°C -328°F to +1832°F -50°C to +1750°C -58°F to +3182°F -200°C to +400°C -328°F to +752°F	J J K K E E S S T T	I _{LK} < 0.5µA	Max 5V	Max 10V
BQ TRX Thermo- resistance	-200°C to +850°C -328°F to +1562°F -200.0°C to +200.0°C -328°F to +392°F -200.0°C to +200.0°C -328°F to +392°F -60°C to +180°C -76°F to +356°F	Pt100 Pt100 Pt250/Pt100 Pt250/Pt100 Pt1000/Pt500 Pt1000/Pt500 Ni100 Ni100	800µA (*) 800µA (*) 90µA (*) 90µA (*) 800µA (*) 800µA (*) 800µA (*) 800µA (*)	Max 5V	Max 10V
BQ TRX Resistance	0 to 20Ω 0 to 200Ω 0 to 2000Ω 0 to 20.00kΩ		800µA (*) 90µA (*) 800µA (*) 90µA (*)	Max 5V	Max 10V
BQ TF1	NPN (DC) PNP (DC) NAMUR (DC) TTL (DC) Free of voltage contact (DC)		600 Ω 600 Ω 600 Ω 600 Ω	15 VAC/DC 15 VAC/DC 15 VAC/DC 15 VAC/DC 15 VAC/DC	20 VAC/DC 20 VAC/DC 20 VAC/DC 20 VAC/DC 20 VAC/DC
BQ TF2	Pick-up (AC) Voltage (AC) up to 100VAC Voltage (AC) up to 500VAC		220 kΩ 950 kΩ	120 VAC/DC 600 VAC/DC	200 VAC/DC 600 VAC/DC

(*) Maximum measuring current generated for resistance equal to 0

Output specifications

RS422/RS485	<p>(on request) Module: BR SX Bidirectional (static and dynamic variables). Display of data reception/transmission Multidrop, 2 or 4 wires, 1000 m Directly on the module by means of jumper 1 to 247, selectable by means of key-pad MODBUS RTU/JBUS</p> <p>Measurement, min value max value alarm status All programming parameters, min max reset reset of latch alarm 8 data bit, no parity, 1 stop bit selectable 4800, 9600, 19200 and 38400 bit/s</p> <p>Static (reading/writing)</p> <p>Data format Baud rate Insulation</p>	<p>BO R2 (2 relay outputs).</p> <p>Relay output BO R1, R2, R4</p> <p>Relay output BO R5</p> <p>Insulation</p> <p>Open collector output</p> <p>Insulation</p>	<p>4, independent with module BO R4 (2 relay outputs + 2 open collector outputs). BO R5 (4 relay outputs) Type SPST AC 1: 8A, 250VAC DC 12: 5A, 24VDC AC 15: 2.5A, 250VAC DC 13: 2.5A, 24VDC Type SPST (NO) AC 1: 5A, 250VAC DC 12: 3A, 24VDC AC 15: 1.5A, 250VAC DC 13: 1.5A, 24VDC 4000 V_{RMS} output to measuring input, 4000 V_{RMS} output to power supply input. NPN transistor type V_{ON} 1.2 VDC/ max. 100 mA V_{OFF} 30 VDC max. By means of opto-couplers 4000 V_{RMS} output to measuring input 4000 V_{RMS} output to power supply input</p>
RS232	<p>(on request) Module: BR SY Bidirectional (static and dynamic variables) 3 wires, max. 15m 1 start bit, 8 data bit, no parity, 1 stop bit Selectable 4800, 9600, 19200 and 38400 bit/s</p> <p>Other features</p>	<p>Range Scaling factor</p> <p>Accuracy Response time Temperature drift Load: 20 mA output 10 V output</p> <p>Insulation</p>	<p>0 to 20 mADC, 0 to 10 VDC Programmable within the entire retransmission range; allows to manage the retransmission of all the values from 0 to 20 mA / 0 to 10V ± 0.2% FS (@ 25°C ± 5°C) ≤ 10 ms ± 200 ppm/°C ≤ 700 Ω ≥ 10 kΩ By means of opto-couplers 4000V_{ms} output to measuring input 4000V_{ms} output to power supply input The two outputs cannot be used at the same time.</p>
Alarm outputs	<p>(on request) Alarm type Over-range alarm, up alarm, down alarm, down alarm with start-up deactivation up alarm with latch, down alarm with latch</p> <p>Adjustable from 0 to 100% of displayed electric range 0 to 100% of displayed range 0 to 255 s 0 to 255 s Selectable: normally energized /de-energized</p> <p>Display colour for alarms Three available colours (green, amber, red) can be coupled to the alarm status (traffic-light function). 500 ms, with filter excluded, without alarm activation delay</p> <p>Min response time 1 with module BO R1 (relay output). 2, independent with module</p>	<p>Notes:</p>	<p>13 VDC ±10%, max. 50 mA 25 VDC ±10%, max. 25 mA 8.2VDC ±10%, max 10mA. 13VDC ±10%, max 40mA. 25V_{RMS} output to measuring input 4000 V_{RMS} output to power supply input</p>
Excitation output	<p>BQ LSE Module Voltage</p> <p>BQ LSF Module Voltage</p> <p>BQTF1 Module Voltage 1 Voltage 2</p> <p>Insulation</p>		

Software functions

Min / Max storage	Automatic storage (in the EEPROM) of the minimum and maximum measured value from the previous memory reset	Diagnostics	rph, krph
Password	Numeric code max 4 dgt 2 levels of data protection. 0 to 4999 completely protected. 5000 to 9999 access to programming is protected . Alarm set-points are directly programmable from the measuring mode.	Burn-out: TC RTD BQTFx	The display flashes when the limits of the display range are exceeded and the data are updated up to 20% of the rated display range. Only temperature inputs Opening of probe's connection: EEE indication Opening of probe's connection: EEE indication probe's short circuit: -EEE indication. Exceeding of frequency range: Err indication
Measurement selection	Depending on the module: measuring range and type of probe (resistance, RTD thermoresistance, TC thermocouple) or measuring type (TRMS or DC).	Digital filter Filter operating range Filtering coefficient	0 to 9999 1 to 32
Function (only BQTFx)	Displayed function of channel A and B: F1: scaled value of channel A; F2: 1/A; F3: A-B; F4: (A-B)/B*100; F5: A/B; F6: B/(A+B)+100; F7: rotation sensing.	Scaling	Selection of min value of the input range. Selection of max value of the input range. Selection of decimal point position. Selection of min display value. Selection of max display value.
Integration time selection	Automatic or from 100.0 to 999.9 ms only in the current and voltage measurement (BQTFx excluded).	Linearization Points Input range Output range	Up to 16 Selectable by every single point Selectable by every single point
Scaling factors Operating mode	Electrical scale compression, displayed scale compression/expansion (max. 2 without filter, up to 10 with filter)	UdmSoft	Software for programming UDM40 by means of PC (Windows 95, 98se, ME, XP) by means of serial port RS485 and relevant connection cable. The software is available in English, Spanish, Italian, German, French. See also "Programming of UDM40 by means of PC".
Electrical range	Programmable within the whole measuring range		
Decimal point position	Programmable within the display range		
Displayed range of the variable	Programmable within the display range		
Pulse per revolution	BQTFx only: programmable from 1 to 9999		
Input engineering unit	BQTFx only: programmable among Hz, kHz, rpm, krpm,		


Supply Specifications

AC/DC voltage	90 to 260V (standard) 18 to 60V (on request) (24 to 48V AC/DC ± 25% according to UL)	Energy consumption	≤ 30VA/12W (90 to 260V) ≤ 20VA/12W (18 to 60V) ≤ 7.5W (10 to 28V)
DC voltage only	10 to 28V (on request) (12 to 24V DC ± 15% according to UL)		

General Specifications

Operating temperature	0° to 50°C (32° to 122°F) (H.R. < 90% non-condensing)	Safety Standards	EN 61010-1, IEC 61010-1
Storage temperature	-10° to 60°C (14° to 140°F) (H.R. < 90% non-condensing)	Connections	Screw type Max. 2.5 mm ² ; Min./Max. screws tightening torque: 0.4 Nm / 0.6 Nm
Insulation reference voltage	300 V _{RMS} to ground (500V input)		
Insulation	See table "Insulation between inputs and outputs"	Housing	1/8 DIN, 48 x 96 x 105 mm PC-ABS, self-extinguishing: UL 94 V-0
Dielectric strength	4000 V _{RMS} for 1 minute	Dimensions	
Rejection		Material	
NMRR	40 dB, 40 to 60 Hz	Protection degree	Front: IP67, NEMA12, NEMA4x "Indoor use only" Connections: IP20
CMRR	100 dB, 40 to 60 Hz		
EMC	EN61000-6-2, IEC61000-6-2 EN61000-6-3, IEC61000-6-3	Weight	520 g approx (included all modules and packing)
		Approvals	CE, cCSA UL e cRUS US

Excitation output

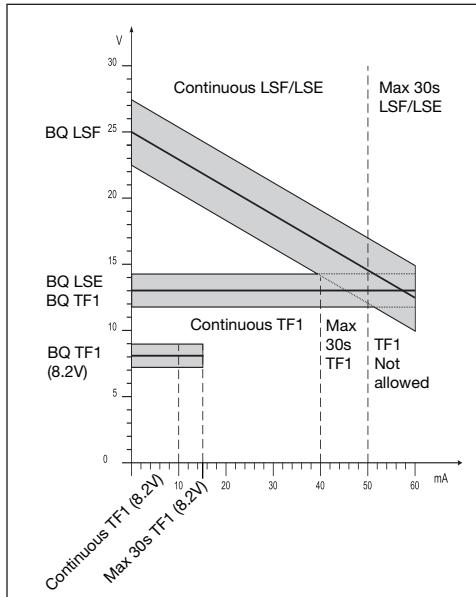

Insulation between inputs and outputs

Available modules

Type	N. of channels	Ordering code
UDM40 main unit		BD 40
DC/AC input: 200µA , 2mA, 20mA, 200mA, 2V, 20V	1	BQ LSX
DC/AC input: 200µA , 2mA, 20mA, 200mA, 2V, 20V + excitation output	1	BQ LSE/ BQ LSF
DC/AC input: 200mA, 2A, 5A, 20V, 200V, 500V	1	BQ HSX
Input: 20Ω, 200Ω, 2kΩ, 20kΩ	1	BQ TRX
TC: J-K-S-T-E, Pt100-250-500-1000	1	BQ TRX
Pulse signals input: 0.001Hz to 50kHz for DC signals	2	BQ TF1
Pulse signals input: 0.001Hz to 50kHz for AC signals	2	BQ TF2
Analogue output 0 to 20mA, 0 to 10VDC	1	BO AV
Relay output	1	BO R1
Relay output	2	BO R2
Outputs: 2 relays + 2 open collectors	4	BO R4
Relay output	4	BO R5
RS485 Serial Port	1	BR SX
RS232 Serial Port	1	BR SY
Power supply 18 to 60V AC/DC		BP L
Power supply 90 to 260V AC/DC		BP H
Power supply 10 to 28V DC		BP 3

Possible module combinations

Basic Unit	Slot A	Slot B	Slot C	Slot D
Measuring inputs: LSX, LSE, LSF, HSX, TRX, TF1, TF2	●			
RS485 Serial port: SX		●		
RS232 Serial port: SY		●		
Analogue output: AV (*)		●	●	
Relay outputs and/or open collector: R1, R2, R4, R5			●	
Power supply: H, L, 3				●

(*) Up to 1 module max.

Used calculation formulas

Only for TRMS Measurements

Instantaneous effective voltage (TRMS)


$$V_1 = \sqrt{\frac{1}{n} \cdot \sum_1^n (V_1)_i^2}$$

Instantaneous effective current (TRMS)


$$A_1 = \sqrt{\frac{1}{n} \cdot \sum_1^n (A_1)_i^2}$$

Wiring diagrams

Process signal wiring diagrams

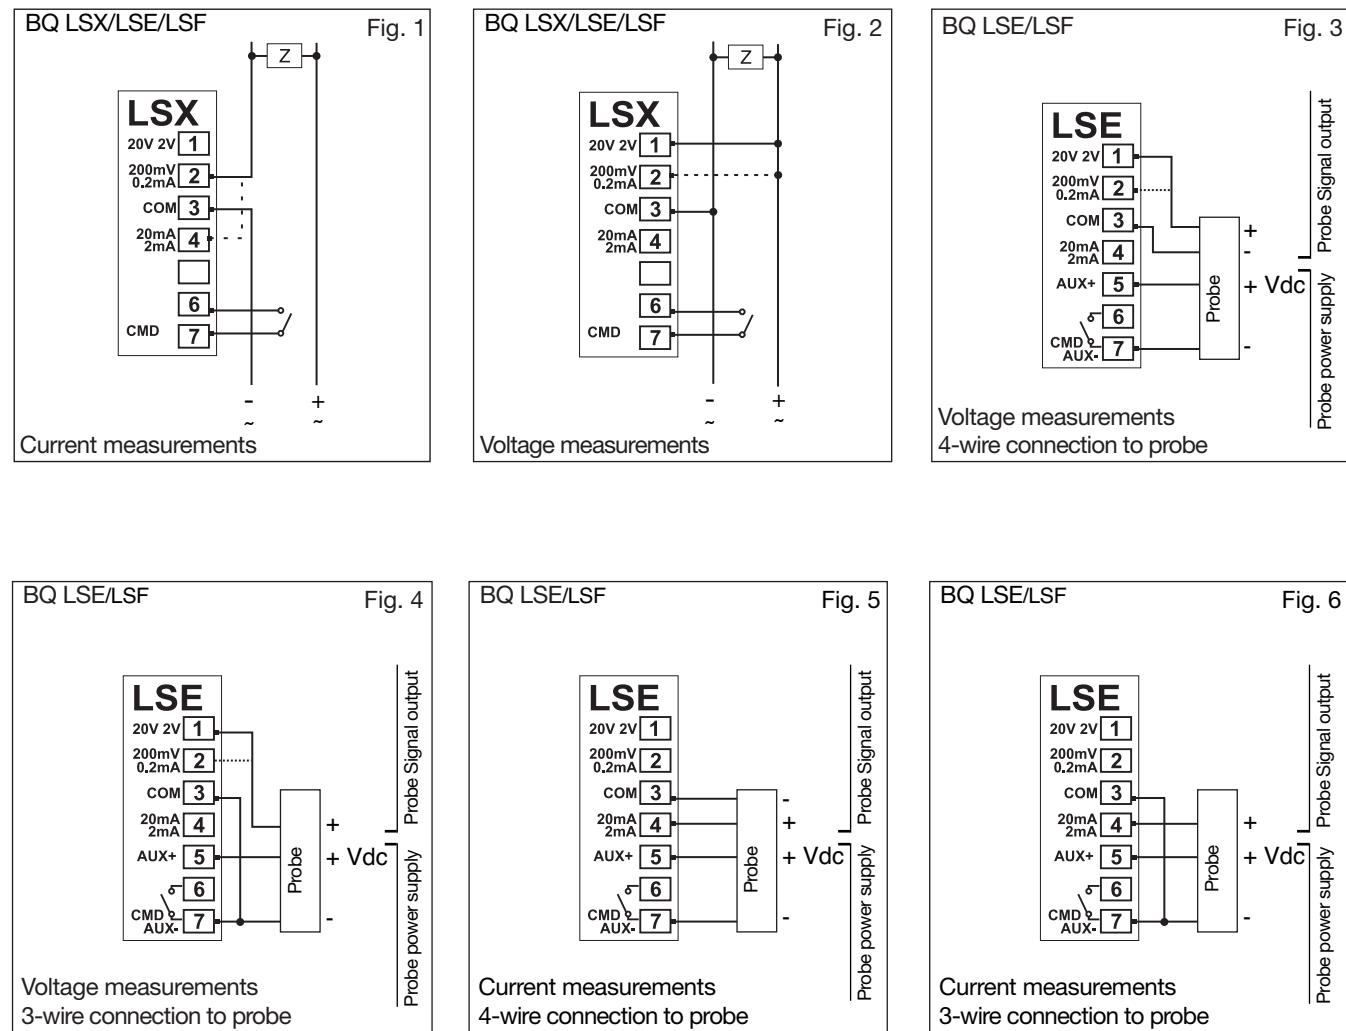


Wirings for high-level signals


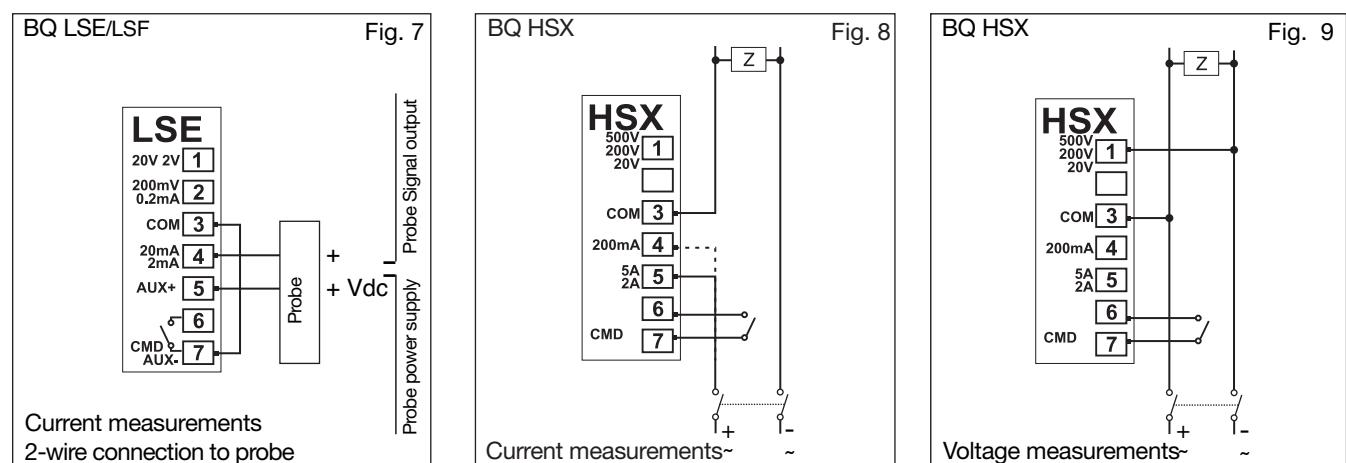


Wiring diagrams (cont.)





Wiring diagrams for temperature measurements

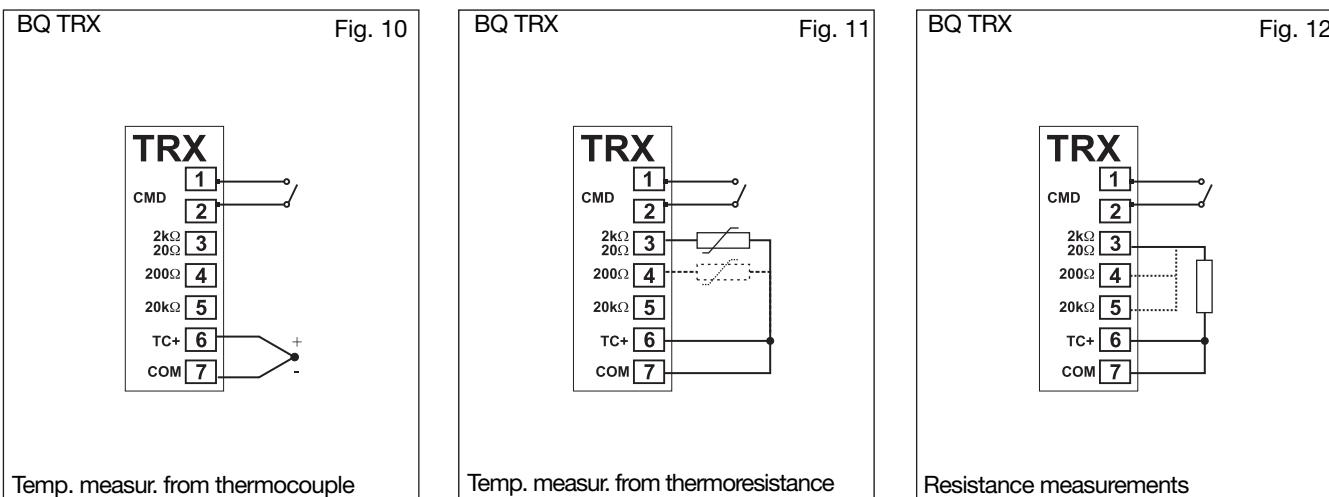




Wiring diagrams for frequency measurements

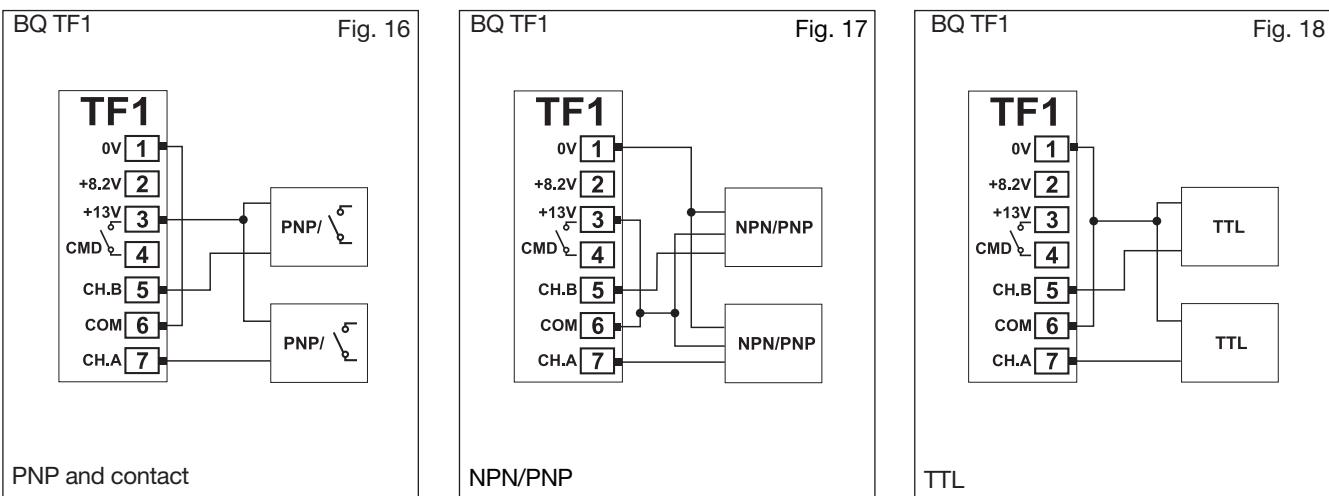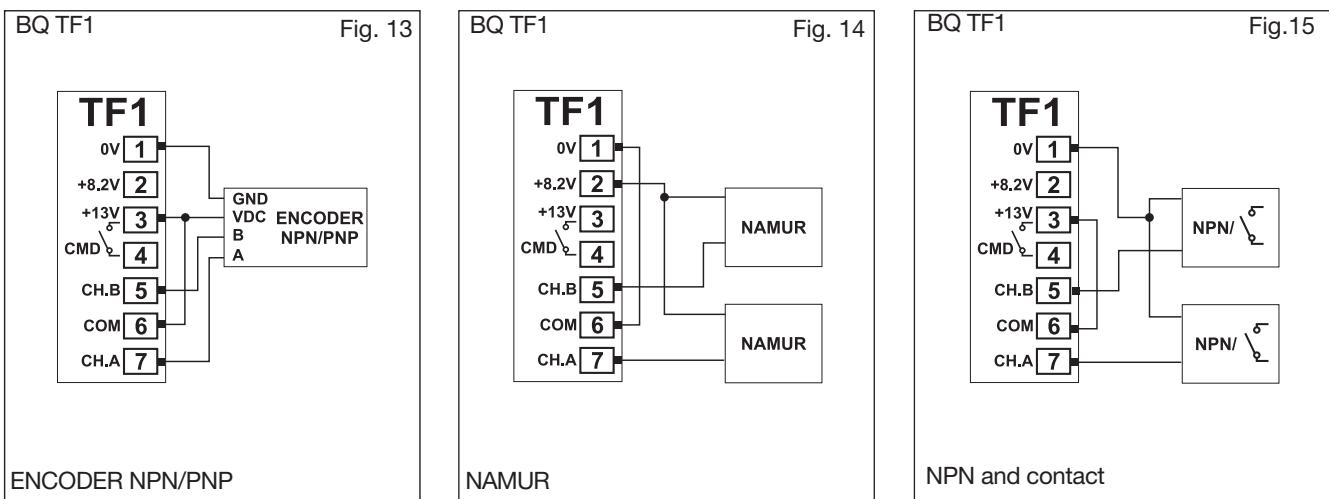


Wiring diagrams (cont.)

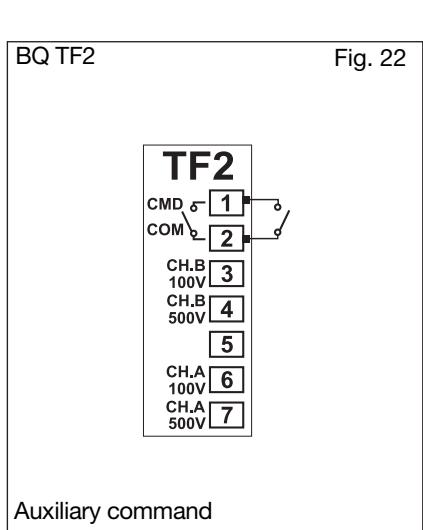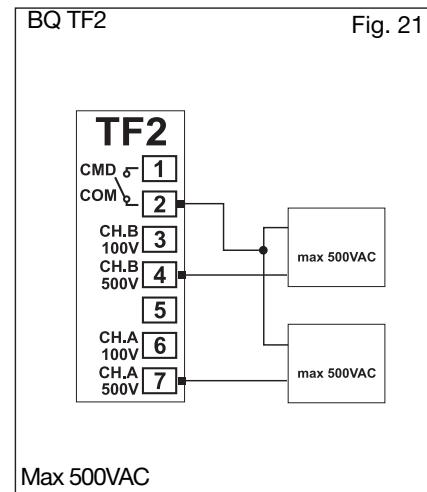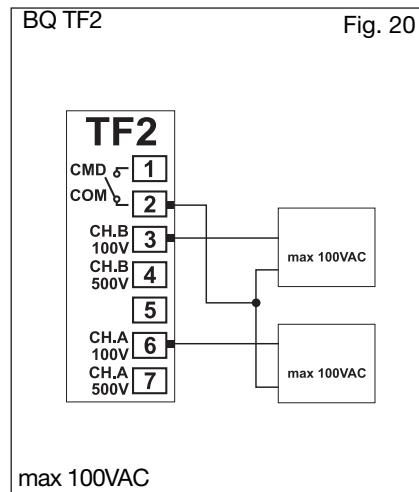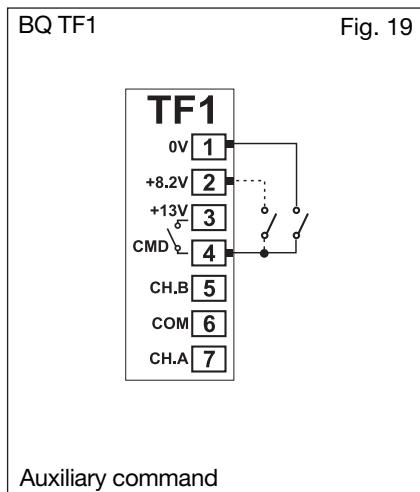


Wiring diagrams for power supply

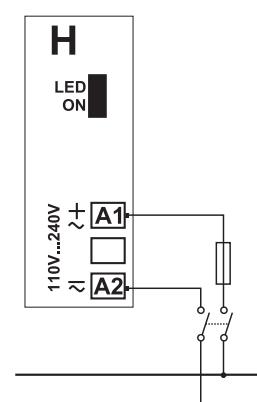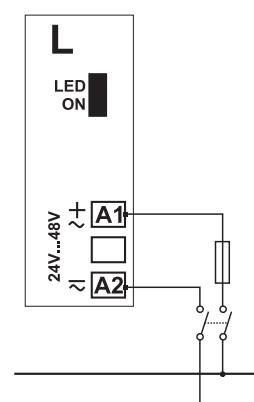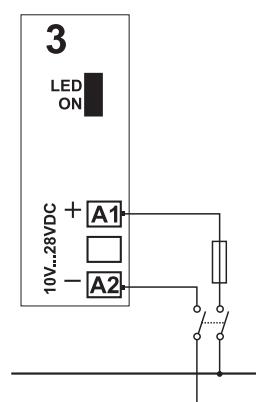BP H: power supply**BP L:** power supply**BP 3:** power supply


Wiring diagrams of optional modules




BO AV: analogue output
(10V, 20mA DC)



BO R1: 1 relay output





BO R2: 2 relay outputs



BO R5: 4 relay outputs

Wiring diagrams of optional modules (cont.)

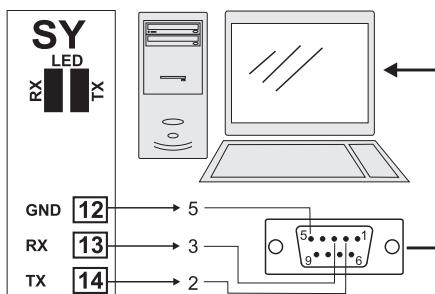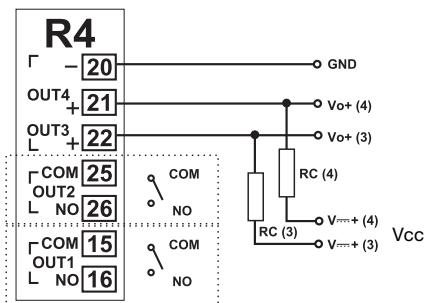


BO SY: RS232 direct connection to PC by means of COM port. RS232 has no termination.

BO R4: dual relay output + dual open collector output: the load resistances (R_c) must be designed so that the close contact current is lower than 100mA; the VDC voltage must be lower than or equal to 30VDC.

VDC: power supply output

Vo+: positive output (open collector transistor).


GND: ground (open collector transistor).

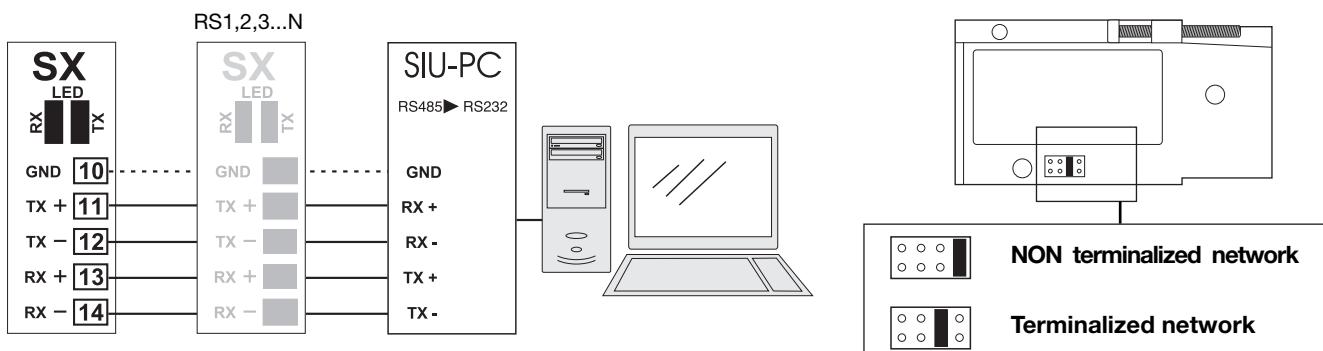

BR SX: RS485 4-wire connection: additional devices provided with RS485 port (indicated as RS1,2,3...N) are connected in parallel. The termination of the serial port is carried out only on the last instrument of the network. The serial module is provided with a jumper for the termination of the RS485 network as shown in the figure above.

Note: particular types of cables or plants may require an external termination. For the network connections use twisted cable type AWG26.


Programming UDM40 by means of PC

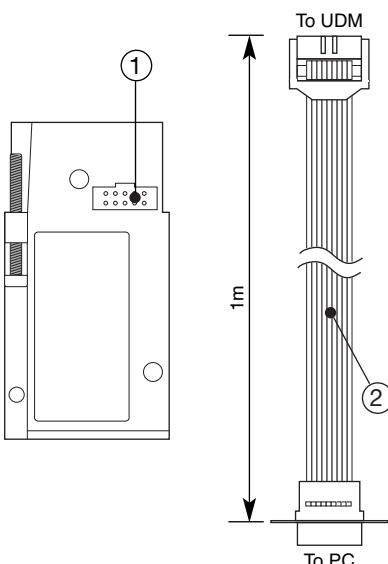

UDM40 is programmable by PC by means of the UdmSoft software (available on request). The user can program all parameters of UDM40 that will be subsequently uploaded and set in the instrument by the RS485 network (BR SX). Should UDM40 be without the RS485 serial module, all programming parameters will be uploaded and set in the instrument by the RS232 auxiliary serial connection (1) located on the side of the measuring input module using the special connection cable (2) available on request, as shown in the figures on the left. It is also possible to program the instrument using the dot connector (1) by means of the HyperTerminal Windows functions of a PC.

Note: the RS232 auxiliary port IS NOT insulated from the measuring inputs.

Front panel description

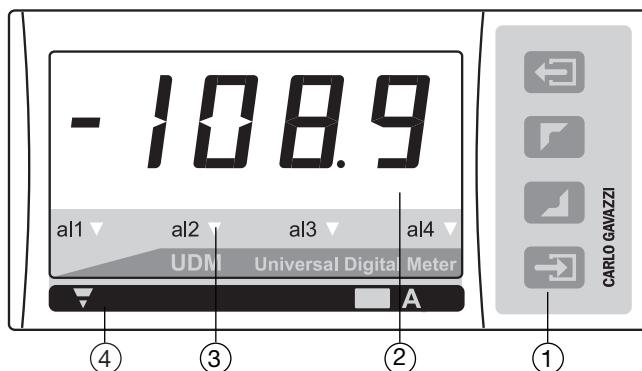

1. Key-pad

The programming of the configuration parameters and the display may be easily controlled by means of the 4 function keys.

: to enter the programming phase and to confirm the password.

- :
- to program values;
- to select functions;
- to scroll display pages.
 : for special functions.

2. Display

Instantaneous measurements:

- 4 digit (max display 9999).

Alphanumeric indications by means of LED display for:

- Display of configuration parameters;

- The measured variable.


3. Alarm status LED

Display any alarm condition

4. Engineering unit

The instrument is supplied with a complete set of self-sticking labels with the main engineering units.

Dimensions

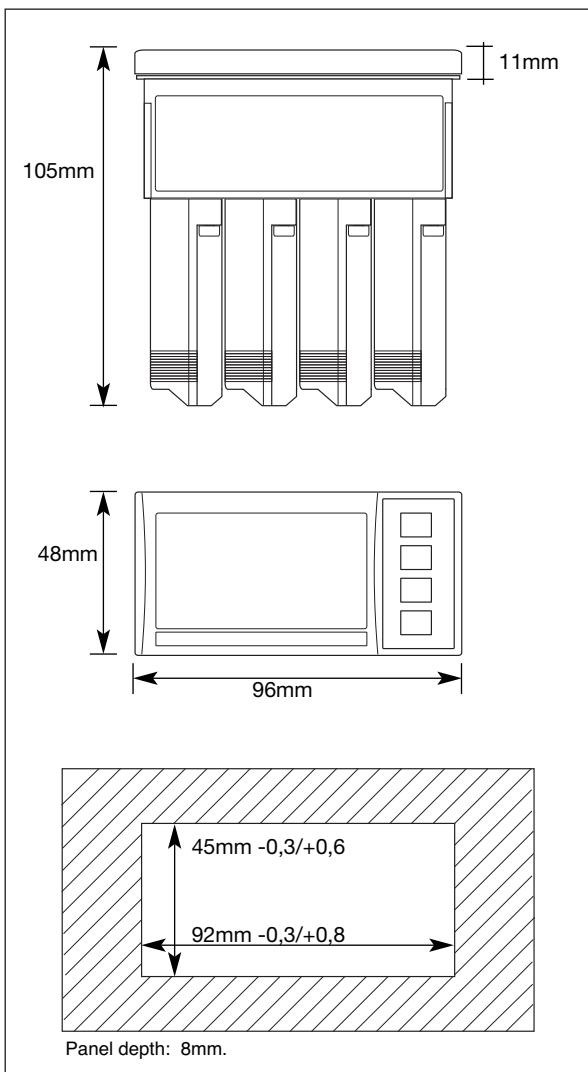


Engineering Units

	A
	V
	VA
	W
	var
	Ω
	g
	Hz
	°F
	°C
	%
	RPM
	m/
	mm H ₂ O
	mm HG
	l/
	Kg/
	m ³ /
	Kg/cm ³
	mbar
	bar
	psi
	mm
	cm
	m
	ppm
	cos φ


Modules

Input modules




BQ LSX, BQ LSE, BQ LSF, BQ HSX, BQ TRX, BQ TF1, BQ TF2
Measuring inputs


Output modules




BO AV
Single analogue output 10V, 20mA DC

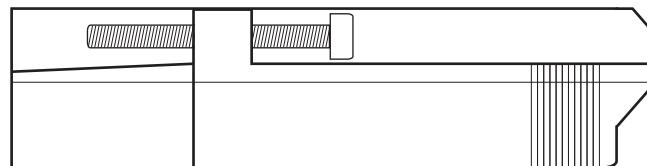


Scale 1:1

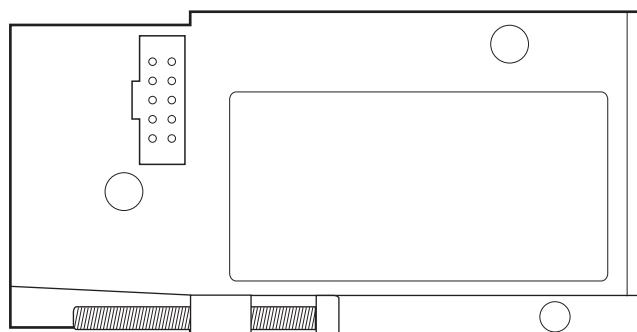


Output modules




BO R1
Single relay output



BO R2
Dual relay output




BO R4
Dual relay output +
Dual open collector




BO R5
4 relay outputs

Serial port modules




BR SX
RS485 Serial port




BR SY
RS232 Serial port


Power supply modules



BP H
Power supply:
60 to 260V AC/DC



BP L
Power supply:
18 to 60V AC/DC



BP 3
Power supply:
10 to 28V DC

Digital Panel Meters

Modular Indicator and Controller for pulse signals

Type UDM60



- Backlighted LCD display

- Dual 6-DGT µP-based controller with analogue indicators
- Dual rate, speed, frequency and period measurement
- Dual counter
- 0.001% RDG basic accuracy
- Range from 0.001Hz to 50kHz/20µs to 1000s
- Scalable inputs and counters
- Linearization of the inputs up to 16 points
- Special calculation functions
- NPN, PNP, NAMUR, TTL, Pick-up, free of voltage contacts and AC signal inputs
- Up to 4 independent alarm set-points (optional)
- 20mA/10VDC analog output (optional)
- Serial port RS485 or RS232 (optional)
- MODBUS, JBUS communication protocol
- Front protection degree: IP67, NEMA12, NEMA4x "Indoor use only"

Product Description

µP-based digital panel meter, dual 6-DGT LCD indicator with analogue indicators, for rate, speed, frequency and period measurements. Measuring ranges, scaling and functions easily programmable from the keypad or from the PC by

means of optional UdmSoft software. UDM60 includes storage min-max functions and double level protection password. Housing for panel mounting with front protection degree: IP67, NEMA12, NEMA4x "Indoor use only".

How to order

Model	UDM60 XXX XX XX X XX
Slot A	<input type="text"/>
Slot B	<input type="text"/>
Slot C	<input type="text"/>
Slot D	<input type="text"/>
Options	<input type="text"/>

How to order

UdmSoft-kit

UdmSoft-kit: software plus communication cable for programming UDM60 by means of PC.

UdmSoft: software for programming UDM60 by means of PC.

Type Selection

Slot A (measuring inputs)	Slot B (communication)	Slot C (communication and alarm)	Slot D (power supply)
TF1: 0.001Hz to 50kHz for DC signals: PNP, NPN, NAMUR, TTL, free of voltage, contacts, voltages up to 14VDC TF2: 0.001Hz to 50kHz for AC signals: pick-up, voltages up to 500VAC	XX: None SX: Serial port RS485 SY: Serial port RS232 AV(*): Single analogue output, 0 to 20mA DC and 0 to 10V DC (*): The two analogue outputs cannot be used at the same time. It is possible to plug in only one module by instrument.	XX: None R1: Single relay output, (AC1-8AAC, 250VAC) R2: Dual relay output, (AC1-8AAC, 250VAC) R4: Dual relay output, (AC1-8AAC, 250VAC) + dual open collector output (NPN, 100mA) R5: 4 relay outputs (AC1-5AAC, 250VAC) AV(*): Single analogue output, 0 to 20mA DC and 0 to 10V DC	H: 90 to 260V AC/DC L: 18 to 60V AC/DC (24 to 48V AC/DC ± 25% according to UL) 3: 10 to 28V DC (12 to 24V DC ± 15% according to UL)
Options			XX: None TX: Tropicalization

Input specifications

Analogue inputs	Channels and variables 2, 0.001Hz to 50kHz for DC signals: PNP, NPN, NAMUR, TTL, free of voltage contacts, voltages up to 14VDC.	Contact reading signal Close contact resistance Open contact resistance Insulation	- latch and counter reset BQ TF1: <6 mA, <7 VDC BQ TF2: <0.25 mA, <3 VDC Max 1kΩ. Min 100kΩ. Non-insulated.
BQ TF1 module			
BQ TF2 module	2, 0.001Hz to 50kHz for AC signals: pick-up, voltages up to 500VAC.		
ON signal minimum time duration	0.001Hz to 50kHz, 10μs.		
Rotation speed detection	Max 1kHz, duty cycle 50%.		
Type of input			
NPN (DC)	Signal level: ON < 2VDC, OFF open collector (leakage current <=1mA).	Humidity	0.05% RDG, 60% to 90% R.H.
PNP (DC)	Signal level: ON > 10VDC, OFF open collector (leakage current <=1mA).	Magnetic field	0.05% RDG @ 400 A/m.
NAMUR (DC)	Signal level: ON <= 1mADC, OFF >= 2.2 mADC.	Temperature drift	See table "Measuring accuracy", temperature drifts and minimum/maximum indications"
TTL (DC)	Signal level: ON > 4VDC, OFF <= 2VDC.	Display	2 lines, 6-digit + 2 analogue indicators. 7 segments. h= 10.0 mm
Free of voltage contact(DC)	Input load: ON < 1kohm, OFF > 20kohm.	Max and min indication	See table "Measuring accuracy", temperature drifts and minimum/maximum indications"
Voltage (AC) up to 100VAC	Signal level: ON > 2VAC (5.65 Vpp).	Measurements	
Voltage (AC) up to 500VAC	Signal level: ON > 9VAC (25.4 Vpp).	Up to 1 kHz From 1 kHz	Zero-crossing detection. Zero-crossing detection with divisor.
Digital inputs	Included in the measuring module. 1 (contact). - display HOLD command - key-pad disabling - latch alarm reset - counter(s) reset	Input impedance	See table "Input impedance and overflow"
Number of inputs		Overloads	See table "Input impedance and overflow"
Use			

Measurement accuracy, temp. drifts, max and min indications

All accuracies and min/max indications are referred to an ambient temp. range of 25°C ±5°C, rel. humidity ≤60% and scale ratio (electrical/displayed scale) equal to 1.

Module	Input type	Accuracy	Temp. drift	Min indication (■)	Max indication
BQ TF1	NPN (DC) PNP (DC) NAMUR (DC) TTL (DC) Free of voltage contact (DC)	0.001% RDG ±3 digit	± 50 ppm/°C	0.00000 00.0000 000.000 0000.00 00000.0 000000	9.99999 99.9999 999.999 9999.99 99999.9 999999
BQ TF2	Pick-up (AC) Voltage (AC) up to 100VAC Voltage (AC) up to 500VAC	0.001% RDG ±3 digit	± 50 ppm/°C	0.00000 00.0000 000.000 0000.00 00000.0 000000	9.99999 99.9999 999.999 9999.99 99999.9 999999

(■) The min indication is -9.99999, ..., -999999 in case of "rotation speed detection" function

Input impedance and overloads

Module	Input type	Impedance	Overload (continuos)	Overload (1s)
BQ TF1	NPN (DC) PNP (DC) NAMUR (DC) TTL (DC) Free of voltage contact (DC)	600 Ω 600 Ω 600 Ω 600 Ω 600 Ω	15 VAC/DC 15 VAC/DC 15 VAC/DC 15 VAC/DC 15 VAC/DC	20 VAC/DC 20 VAC/DC 20 VAC/DC 20 VAC/DC 20 VAC/DC
BQ TF2	Pick-up (AC) Voltage (AC) up to 100VAC Voltage (AC) up to 500VAC	220 kΩ 950 kΩ	120 VAC/DC 600 VAC/DC	200 VAC/DC 600 VAC/DC

Output specifications

RS422/RS485	(on request) Module: BR SX Bidirectional (static and dynamic variables). Display of data reception/transmission Multidrop, 2 or 4 wires, 1000 m Directly on the module by means of jumper 1 to 247, selectable by means of key-pad MODBUS RTU/JBUS	Alarm set-point Hysteresis On-time delay Off-time delay Output status Min response time Output channels	down alarm, down alarm with start-up deactivation up alarm with latch, down alarm with latch Adjustable from 0 to 100% of displayed electric range 0 to 100% of displayed range 0 to 255 s 0 to 255 s Selectable: normally energized /de-energize 500 ms, with filter excluded, without alarm activation delay 1 with module BO R1 (relay output). 2, independent with module BO R2 (2 relay outputs). 4, independent with module BO R4 (2 relay outputs + 2 open collector outputs). BO R5 (4 relay outputs) Type SPST AC 1: 8A, 250VAC DC 12: 5A, 24VDC AC 15: 2.5A, 250VAC DC 13: 2.5A, 24VDC Type SPST (NO) AC 1: 5A, 250VAC DC 12: 3A, 24VDC AC 15: 1.5A, 250VAC DC 13: 1.5A, 24VDC 4000 V _{RMS} output to measuring input, 4000 V _{RMS} output to power supply input. NPN transistor type V _{ON} 1.2 VDC/ max. 100 mA V _{OFF} 30 VDC max. By means of opto-couplers 4000 V _{RMS} output to
RS232	(on request) Module: BR SY Bidirectional (static and dynamic variables) 3 wires, max. 15m 1 start bit, 8 data bit, no parity, 1 stop bit Selectable 4800, 9600, 19200 and 38400 bit/s	Insulation Open collector output Insulation	4000 V _{RMS} output to measuring input, 4000 V _{RMS} output to power supply input. NPN transistor type V _{ON} 1.2 VDC/ max. 100 mA V _{OFF} 30 VDC max.
Alarm outputs	(on request) Over-range alarm, up alarm,		
Alarm type			

Output specifications (cont.)

	measuring input 4000 V _{RMS} output to power supply input	
Analogue output	<p>(on request) Module: BO AV</p> <p>0 to 20 mA, 0 to 10 VDC Programmable within the entire retransmission range; allows to manage the retransmission of all the values from 0 to 20 mA / 0 to 10V $\pm 0.2\%$ FS (@ 25°C ± 5°C) ≤ 10 ms ± 200 ppm/°C ≤ 700 Ω ≥ 10 kΩ By means of opto-couplers 4000V_{RMS} output to</p>	<p>Notes:</p> <p>Excitation output Isolation</p>
Range Scaling factor		measuring input 4000V _{RMS} output to power supply input The two outputs cannot be used at the same time.

Software functions

Password	Numeric code max 4 dgt 2 levels of data protection. 1st level 0 to 4999 completely protected. 2nd level 5000 to 9999 access to programming is protected, while alarm set-points are directly programmable from the measuring mode.	Filter action	On measurements, serial output, analogue output
Scaling parameters	Pulse per revolution	Operating modes	See "list of selectable functions and variables"
Input engineering unit	Programmable and independent per each channel (only in case of dual frequency meter), from 1 to 9999. Programmable among Hz, kHz, rpm, krpm, rph, krph, and independent per each channel (only in case of dual frequency meter). Selection of the decimal point, min value and max value of the input range (expressed in engineering units). Selection of the decimal point, min value and max value of the displayed range correspondent to the input range.	Displayed values	See "list of selectable functions and variables"
Scaling		Min max storage	Automatic storage (in the EEPROM) of the minimum and maximum measured values from the previous memory reset
Linearisation	Programmable and independent per each channel (only in case of dual frequency meter). Up to 16 Input value and displayed value of each point within the programmable input and display range	Setpoint modification	Direct access to the set-point modification from the measuring mode (if allowed by the selected password).
Points Range		Latch alarm reset	Direct access to the reset from the measuring mode.
Filter	0 to 100% of the displayed value of channel A 1 to 32	Counter reset	Direct access to the reset from the measuring mode.
Operating range		Analogue indicators	11 positions (9 values between the minimum display value and the maximum display value, underflow and overflow) or speed rotation direction.
Filtering coefficient		Diagnostic Overflow/Underflow	Analogue indicator overflow or underflow position "EEE" indication "Err" indication
		UdmSoft	Software for programming UDM60 by means of PC (Windows 95, 98se, ME, XP) by means of serial port RS485 and relevant connection cable. The software is available in English, Spanish, Italian, German, French. See also "Programming of UDM60 by means of PC".


General specifications

Operating temperature	0°C to +50°C (32°F to 122°F) (R.H. ≤ 90% non-condensing)	Connections Cable cross-section area	Screw-type Max. 2.5 mm ² ; Min./Max. screws tightening torque: 0.4 Nm / 0.6 Nm
Storage temperature	-10°C to +60°C (-14°F to 140°F) (R.H. ≤ 90% non-condensing)	Housing DIN Dimensions (WxHxD) Material	48 x 96 x 105 mm PC-ABS, self-extinguishing: UL 94 V-0
Insulation reference voltage	300 VRMS to ground (500V input)	Protection degree Front Screw terminals	IP67, NEMA12, NEMA4x "Indoor use only" IP20
Insulation	See table "Insulation between input and outputs"		
Dielectric strength	4000 VRMS for 1 minute	Weight	Approx. 520 g (packing included)
Noise rejection	NMRR CMRR	Approvals	CE, cCSA UL e cRUS US
	40dB, 40 to 60 Hz 100 dB, 48 to 62 Hz		
EMC	EN61000-6-2, IEC61000-6-2 EN61000-6-3, IEC61000-6-3		
Standard compliance			
Safety	EN61010-1, IEC61010-1		

Supply Specifications

AC/DC voltage	90 to 260V (standard) 18 to 60V (on request) (24 to 48V AC/DC ± 25% according to UL)	Energy consumption	≤ 30VA/12W (90 to 260V) ≤ 20VA/12W (18 to 60V) ≤ 7.5W (10 to 28V)
DC voltage only	10 to 28V (on request) (12 to 24V DC ± 15% according to UL)		

Excitation output

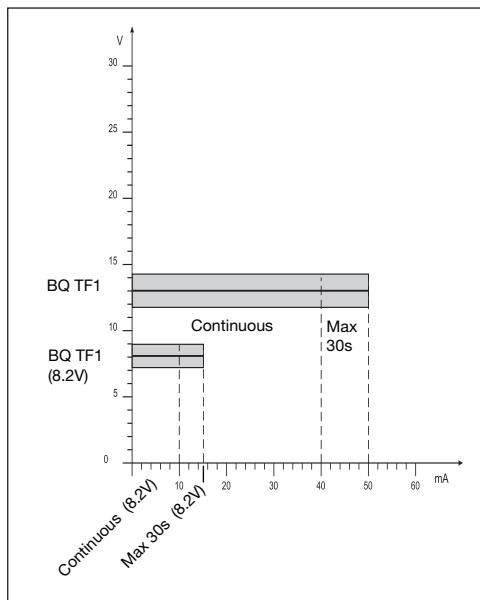

Insulation between inputs and outputs

List of selectable functions and variables

	Name	Description	Variables on display
F1	Frequency meter, tachometer	Scaled value of Channel A and Channel B	Channel A and channel B
F2	Period meter	1/A	Channel A and function result
F3	Speed difference	A-B	Channel A and function result
F4	Speed error ratio	(A-B)/B*100	Channel A and function result
F5	Speed ratio	A/B	Channel A and function result
F6	Concentration of a liquid in a mixture	B/(A+B)*100	Channel A and function result
F7	Rotation sensing	Scaled value of Channel A and relevant rotation sensing	Channel A and rotation direction (on the analogue indicator)
F8	Frequency meter + counter	Channel A + counter channel A	Channel A and relevant counter
F9	Frequency meter + counter	Channel A + counter channel B	Counter relevant to channel A and counter relevant to channel B
F10	Dual counter	Counter channel A + counter channel B	Counter relevant to channel A and counter relevant to channel B
F11	Total and partial counter	Counter channel A + counter channel (A+B)	Counter relevant to channel A and counter relevant to the sum of channel A and B

Available modules








Type	N. of channels	Ordering code
UDM60 main unit		BD 60
Pulse signals input: 0.001Hz to 50kHz for DC signals	2	BQ TF1
Pulse signals input: 0.001Hz to 50kHz for AC signals	2	BQ TF2
Analogue output 0 to 20mA, 0 to 10VDC	1	BO AV
Relay output	1	BO R1
Relay output	2	BO R2
Outputs: 2 relays + 2 open collectors	4	BO R4
Relay output	4	BO R5
RS485 Serial Port	1	BR SX
RS232 Serial Port	1	BR SY
Power supply 18 to 60V AC/DC		BP L
Power supply 90 to 260V AC/DC		BP H
Power supply 10 to 28V DC		BP 3

Possible module combinations




Basic Unit	Slot A	Slot B	Slot C	Slot D
Measuring inputs: TF1, TF2	●			
RS485 Serial port: SX		●		
RS232 Serial port: SY		●		
Analogue output: AV (*)		●	●	
Relay outputs and/or open collector: R1, R2, R4, R5			●	
Power supply: H, L, 3				●

(*) Up to 1 module max.

Wiring diagrams

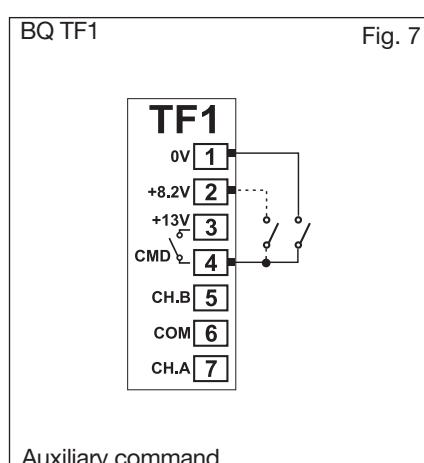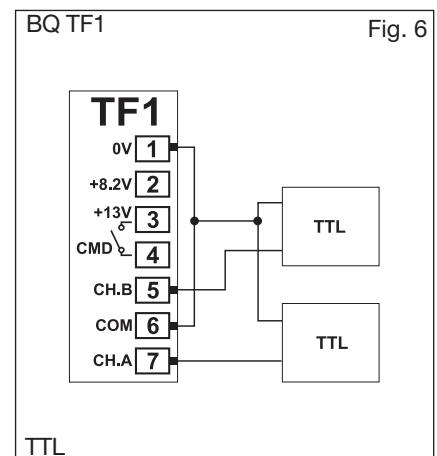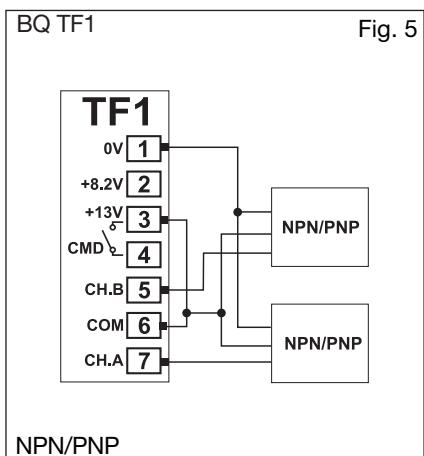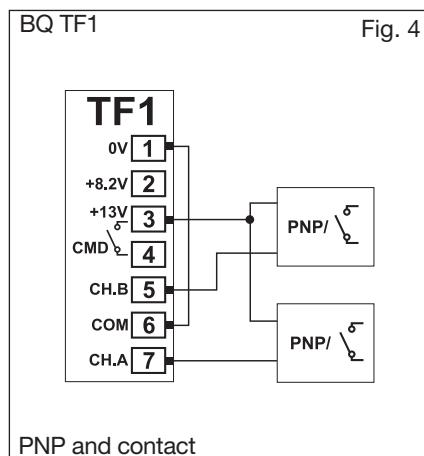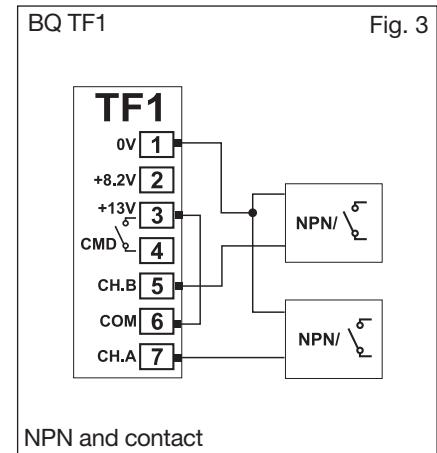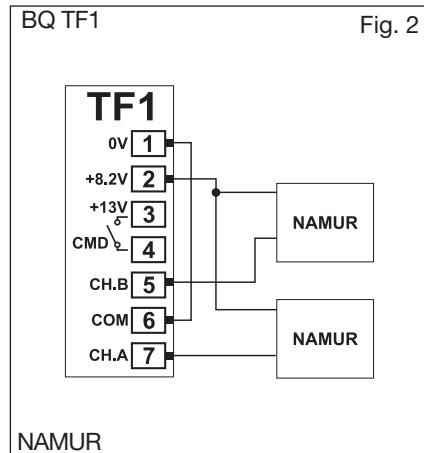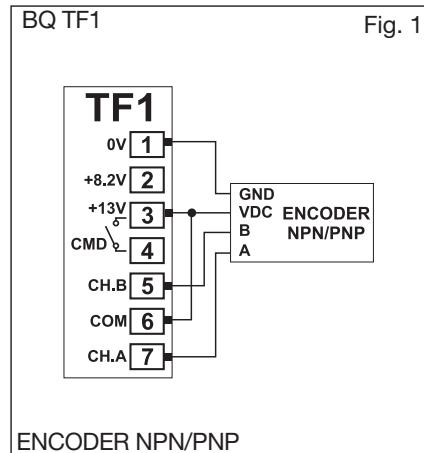


Wiring diagrams (cont.)

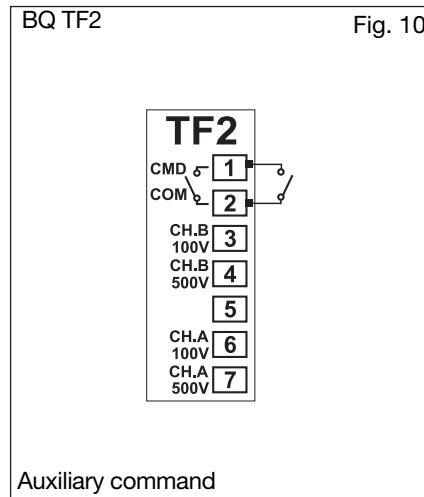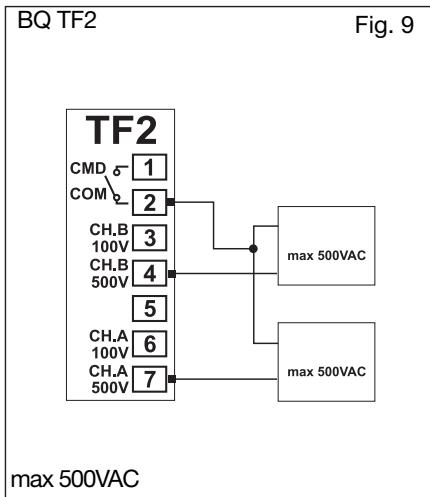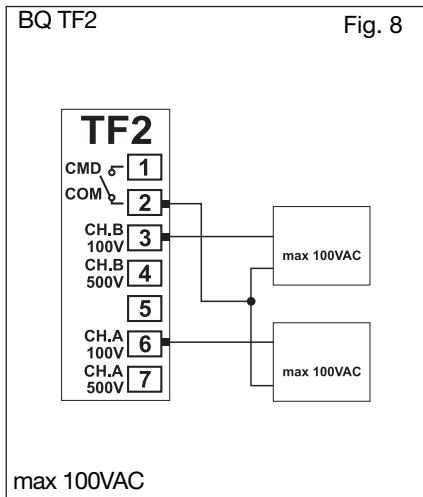


Wiring diagrams for power supply

BP H: power supply

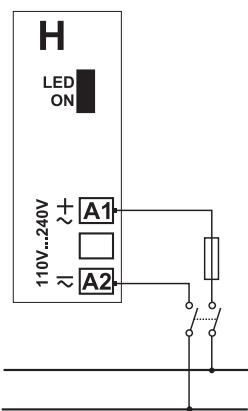


F1= 630mA T
250V 5x20mm

BP L: power supply

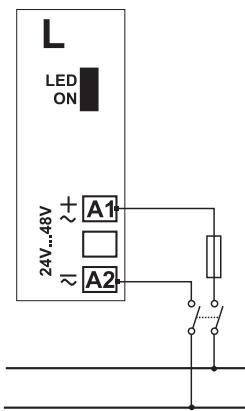


F1= 3.15A T
250V 5x20mm

BP 3: power supply

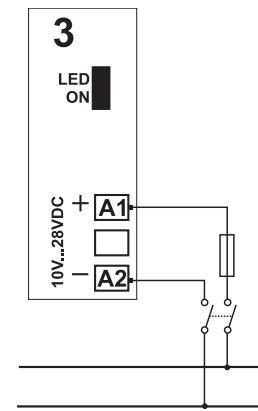


F1= 3.15A T
250V 5x20mm


Wiring diagrams of optional modules




BO AV: analogue output
(10V, 20mA DC)



BO R1: 1 relay output





BO R2: 2 relay outputs




BO R5: 4 relay outputs

Wiring diagrams of optional modules (cont.)

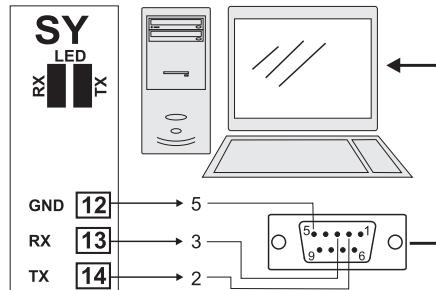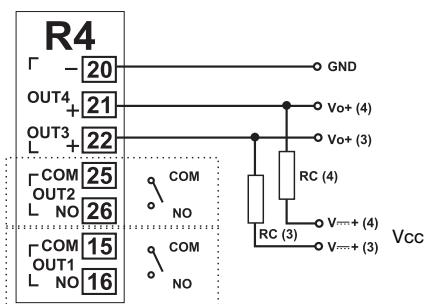

BO SY: RS232 direct connection to PC by means of COM port. RS232 has no termination.


BO R4: dual relay output + dual open collector output: the load resistances (Rc) must be designed so that the close contact current is lower than 100mA; the VDC voltage must be lower than or equal to 30VDC.
 VDC: power supply output
 Vo+: positive output (open collector transistor).
 GND: ground (open collector transistor).

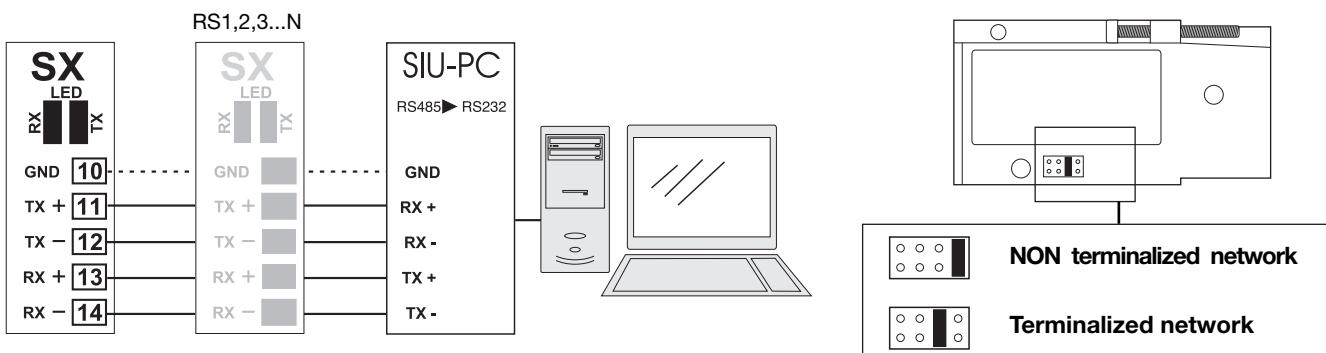

BR SX: RS485 4-wire connection: additional devices provided with RS485 port (indicated as RS1,2,3...N) are connected in parallel. The termination of the serial port is carried out only on the last instrument of the network. The serial module is provided with a jumper for the termination of the RS485 network as shown in the figure above.

Note: particular types of cables or plants may require an external termination. For the network connections use twisted cable type AWG26.


Programming UDM60 by means of PC

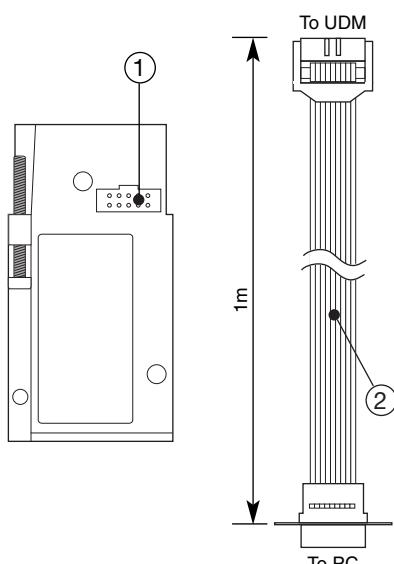

UDM60 is programmable by PC by means of the UdmSoft software (available on request). The user can program all parameters of UDM60 that will be subsequently uploaded and set in the instrument by the RS485 network (BR SX module) or by the RS232 connection (BR SY module). Should UDM60 be equipped without the RS485 or RS232 serial module, all programming parameters will be uploaded and set in the instrument by UdmSoft and the RS232 auxiliary serial connection (1) located on the side of the measuring input module using the special connection cable (2) available on request, as shown in the figures on the left. It is also possible to program the instrument using the dot connector (1) by means of the HyperTerminal Windows functions of a PC.

Note: the RS232 auxiliary port IS NOT insulated from the measuring inputs.

Front panel description

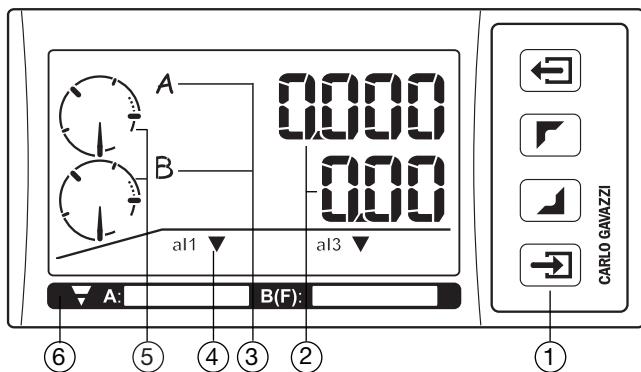

1. Key-pad

The programming of the configuration parameters and the display may be easily controlled by means of the 4 function keys.

: to enter the programming phase and to confirm the password.

:

- to program values;
- to select functions;
- to scroll display pages.

: for special functions.

2. Display

Instantaneous measurements:

- 2 x 6 digit (max display 999999).

Alphanumeric indications by means of LCD display for:

- display of configuration parameters;
- the measured variables.

3. Variable type indicators

Display the type of the variables (A for channel A, B for channel B or F for function, min for valley value, max for peak value).

4. Alarm status indicators

Display any alarm condition


5. Analogue indicators

Display graphically the amplitude of the variables with respect to their selected minimum and maximum limits; display overload or underload conditions; display of the rotation direction.

6. Engineering unit

The instrument is supplied with a complete set of self-sticking labels with the main engineering units.

Dimensions and panel cut-out

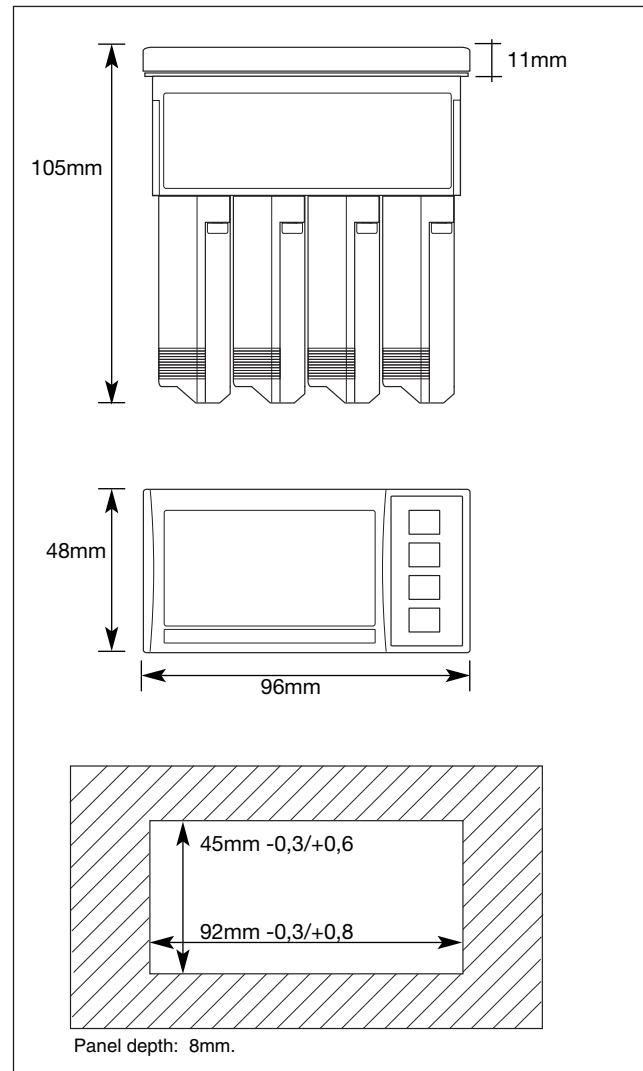


Engineering Units

A: RPM	B(F):	A: m³	B(F):
A: RPH	B(F):	A: km/h	B(F):
A: MPH	B(F):	A: m/h	B(F):
A: ms	B(F):	A: cm/h	B(F):
A: sec	B(F):	A: mm/h	B(F):
A: min	B(F):	A: kg/m³	B(F):
A: h	B(F):	A: g/cm³	B(F):
A: Hz	B(F):	A: l/s	B(F):
A: kHz	B(F):	A: l/min	B(F):
A: mm/s	B(F):	A: l/h	B(F):
A: cm/s	B(F):	A: m³/s	B(F):
A: m/s	B(F):	A: m³/min	B(F):
A: mm/min	B(F):	A: m³/h	B(F):
A: cm/min	B(F):	A: kWh	B(F):
A: m/min	B(F):	A: kvarh	B(F):
A: cm³	B(F):	A:	B(F):


Modules

Input modules


**BQ TF1, BQ TF2**

Measuring inputs


Output modules

**BO AV**


Single analogue output 10V, 20mA DC

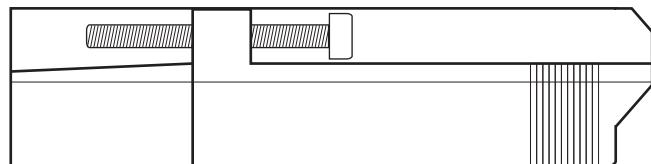


Scale 1:1

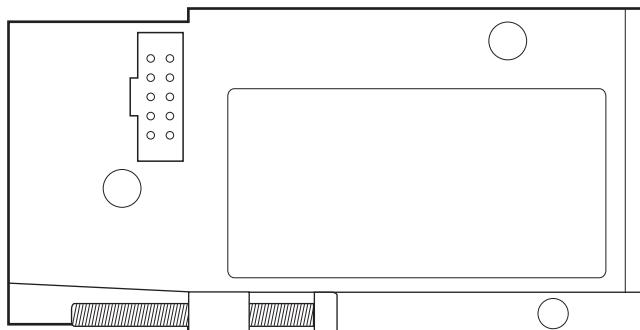



Output modules

**BO R1**

Single relay output


**BO R2**

Dual relay output


**BO R4**Dual relay output +
Dual open collector**BO R5**

4 relay outputs

Serial port modules




**BR SX**

RS485 Serial port

**BR SY**

RS232 Serial port

Power supply modules

**BP H**Power supply:
60 to 260V AC/DC**BP L**Power supply:
18 to 60V AC/DC**BP 3**Power supply:
10 to 28V DC

По вопросам продаж и поддержки обращайтесь:

Алматы (7273)495-231	Казань (843)206-01-48	Новокузнецк (3843)20-46-81	Смоленск (4812)29-41-54
Архангельск (8182)63-90-72	Калининград (4012)72-03-81	Новосибирск (383)227-86-73	Сочи (862)225-72-31
Астрахань (8512)99-46-04	Калуга (4842)92-23-67	Омск (3812)21-46-40	Ставрополь (8652)20-65-13
Барнаул (3852)73-04-60	Кемерово (3842)65-04-62	Орел (4862)44-53-42	Сургут (3462)77-98-35
Белгород (4722)40-23-64	Киров (8332)68-02-04	Оренбург (3532)37-68-04	Тверь (4822)63-31-35
Брянск (4832)59-03-52	Краснодар (861)203-40-90	Пенза (8412)22-31-16	Томск (3822)98-41-53
Владивосток (423)249-28-31	Красноярск (391)204-63-61	Пермь (342)205-81-47	Тула (4872)74-02-29
Волгоград (844)278-03-48	Курск (4712)77-13-04	Ростов-на-Дону (863)308-18-15	Тюмень (3452)66-21-18
Вологда (8172)26-41-59	Липецк (4742)52-20-81	Рязань (4912)46-61-64	Ульяновск (8422)24-23-59
Воронеж (473)204-51-73	Магнитогорск (3519)55-03-13	Самара (846)206-03-16	Уфа (347)229-48-12
Екатеринбург (343)384-55-89	Москва (495)268-04-70	Санкт-Петербург (812)309-46-40	Хабаровск (4212)92-98-04
Иваново (4932)77-34-06	Мурманск (8152)59-64-93	Саратов (845)249-38-78	Челябинск (351)202-03-61
Ижевск (3412)26-03-58	Набережные Челны (8552)20-53-41	Севастополь (8692)22-31-93	Череповец (8202)49-02-64
Иркутск (395)279-98-46	Нижний Новгород (831)429-08-12	Симферополь (3652)67-13-56	Ярославль (4852)69-52-93
Россия (495)268-04-70	Киргизия (996)312-96-26-47	Казахстан (7172)727-132	